

## ALU BENCH



Aluminum bench with RGBW lighting from below. The product is available in any color from the RAL palette. Bench size can be made to order. Available additional elements such as a trash bin, ashtray, etc. The bench fits perfectly with the H-Light luminaire.

<b>Mounting:</b>	Directly on the ground
<b>Body material:</b>	Aluminium
<b>Colour:</b>	Standard gray RAL 9006, other RAL colours on request ( please add RAL code after index number )
<b>LED module:</b>	RGBW LED stripes
<b>Colour temperature:</b>	RGBW, other on request
<b>Colour Rendering Index (CRI):</b>	>80 in standard
<b>Driver:</b>	Electronic driver with remote colour controller
<b>Emergency unit:</b>	N/A
<b>Movement sensor:</b>	N/A
<b>Daylight control sensor:</b>	N/A
<b>Operating temperature range:</b>	- 20°C ... +40°C
<b>IP Class:</b>	IP65
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct lighting
<b>Reflector type:</b>	N/A
<b>Light distribution:</b>	Symmetric
<b>Diffusor:</b>	Clear acrylic diffusor
<b>General data:</b>	5 Years standard warranty

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffusor and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.

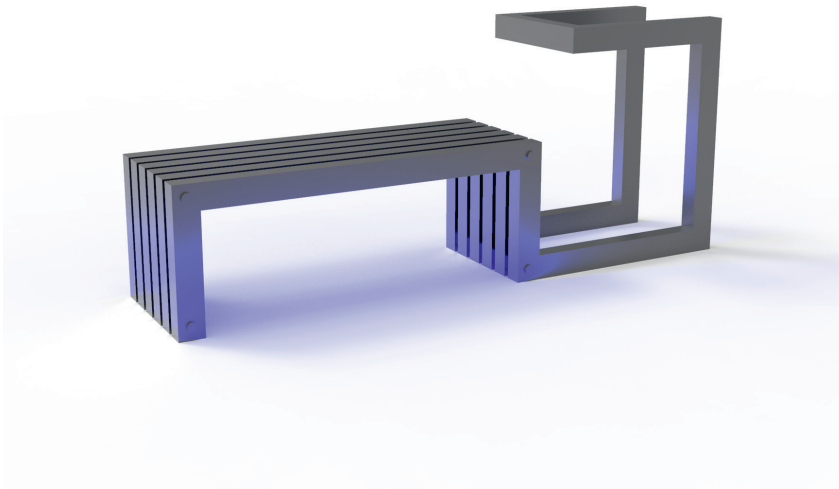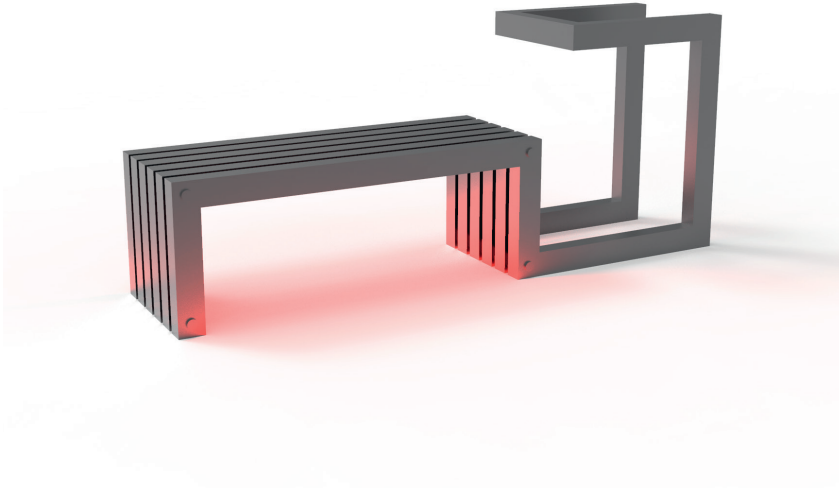

Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
7189.1400/830	1400	1400	88	16	3000	Ra > 80	30.000	4	49,00
7189.1400/840	1400	1400	88	16	4000	Ra > 80	30.000	4	49,00
7189.600/RGB	600	600	25	24	RGB	Ra > 80	30.000	4	49,00