


ARKI LINE GROUND

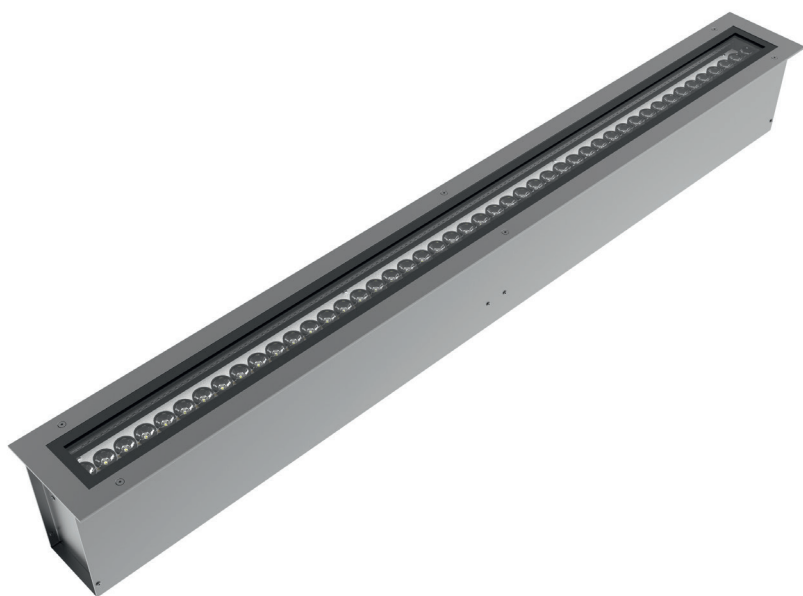

Avoid walking over or car traffic

In-ground mounted IP67 LED luminaire.

Mounting:	In the ground
Body material:	Aluminium and stainless steel
Colour:	Standard Anthracite grey 7016, other RAL colours on request (please add RAL code after index number)
LED module:	Signify (Philips), Osram, Tridonic or equivalent LED module included.
Colour temperature:	3000K, 4000K in standard, RGBW version on request
Colour Rendering Index (CRI)	>80 in standard
Driver:	Electronic driver, DALI or DMX on request
Emergency unit:	N/A
Movement sensor:	N/A
Daylight control sensor:	N/A
Operating temperature range:	- 20°C ... +40°C
IP Class:	IP67
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Reflector type:	Integrated lenses
Light distribution:	Symmetric / Asymmetric
Diffuser:	Clear tempered glass in standard, mat on request
General data:	5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist


Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffusor and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Length [mm]	Weight [kg]
7619.8000/830	6700	8000	96	70	3000	Ra > 80	50.000	3	964	4,20
7619.8000/840	6700	8000	96	70	4000	Ra > 80	50.000	3	964	4,20
7509.12000/830	10000	12000	100	100	3000	Ra > 80	50.000	3	1434	5,50
7509.12000/840	10000	12000	100	100	4000	Ra > 80	50.000	3	1434	5,50

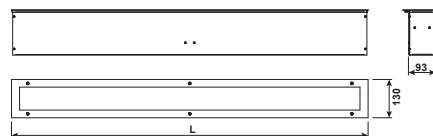

940x95
1360x95