


COWI SURF LED SR

Surface mounted LED luminaire with Philips LED modules, Xitanium SR Dali 2.0 standard driver and EasyAir sensor.

Mounting:	Directly on the ceiling
Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request (please add RAL colour after index number)
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000 / 4000K, other on request
Colour Rendering Index (CRI)	>80 in standard
Driver:	Xitanium SR
Emergency unit:	On request - Standard or DALI 3 hour emergency unit
Movement sensor:	EasyAir sensor included
Daylight control sensor:	EasyAir sensor included
Operating temperature range:	0°C ... +40°C
IP Class:	IP20
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Reflector type:	Aluminium white
Light distribution:	Symmetric
Diffuser:	[WD] white opalic in standard, Microprismatic [MPR] on request
General data:	5 Years standard warranty Different lumen output or wattage available on request All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used Efficacy depends on type of LED's, electronics, optics and diffusor and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.

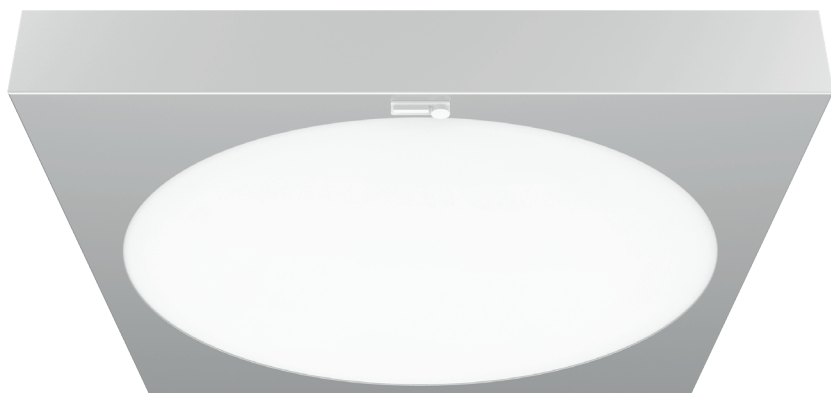

Luminaire is equipped with EasyAir Sensor:
Communication between luminaires without wires
Easy smartphone commissioning
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)



Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	LED Power [W]	Colour temp. [K]	Colour tolerance [MacAdam]	CRI	Lifetime [h]	Weight [kg]
6261.SR.5000/830/WD	4200	5000	110	38	3000	3	Ra > 80	50.000	5,20
6261.SR.5000/840/WD	4200	5000	110	38	4000	3	Ra > 80	50.000	5,20

* Different lumen output or wattage available on request.
* Different size or mounting for special ceiling systems on request.

