


H-LIGHT

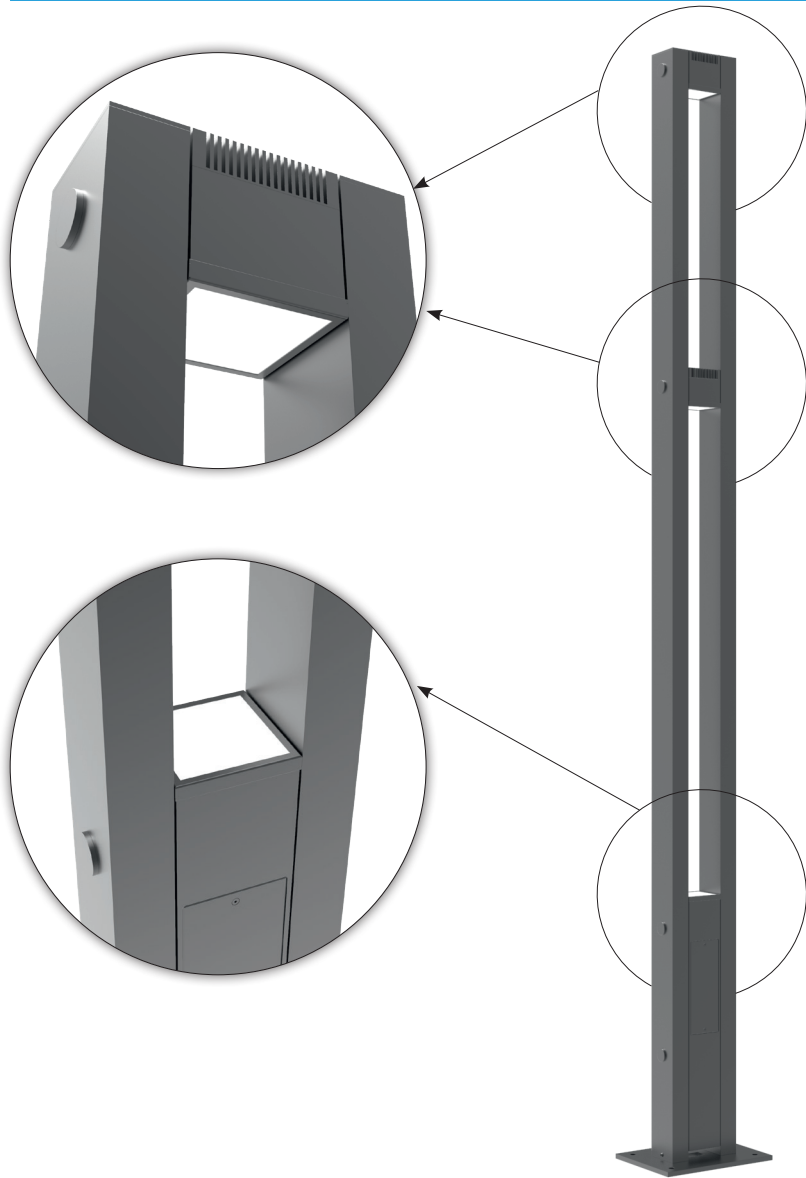

Outdoor IP65 LED luminaire.

- Mounting:** On the ground, by direct mounting base or concrete mounting base - details below
- Body material:** Aluminium and steel
- Colour:** Standard gray RAL 9006, other RAL colours on request (please add RAL code after index number)
- LED module:** Signify (Philips), Osram or Tridonic LED module included
- Colour temperature:** 3000K or 4000K, other on request
- Colour Rendering Index (CRI):** >80 in standard
- Driver:** Electronic driver
- Emergency unit:** N/A
- Movement sensor:** N/A
- Daylight control sensor:** N/A
- Operating temperature range:** - 20°C ... +40°C
- IP Class:** IP65
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting with possibility of light direction adjustment
- Reflector type:** N/A
- Light distribution:** Symmetric, other lenses on request
- Diffusor:** Clear tempered glass in standard, mat on request
- General data:** 5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.


System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffusor and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
7617.9000/830	6000	9000	74	81	3000	Ra > 80	50.000	3	50,00
7617.9000/840	6000	9000	74	81	4000	Ra > 80	50.000	3	50,00

Mounting base

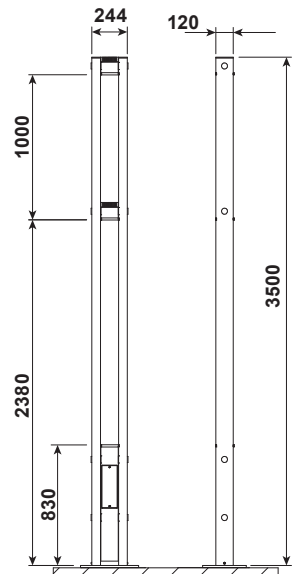

designed by **Andrew Pruszyński**
www.bdesign.com.pl
 technical development and production by Imperial