


LED STAND



Free standing floor LED luminaire with direct and indirect lighting.

Mounting:	Free standing
Body material:	Steel and aluminium
Colour:	Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
LED module:	Signify (Philips), Osram, Tridonic or equivalent LED module included.
Colour temperature:	3000K or 4000K
Colour Rendering Index (CRI)	>80 in standard, other on request
Driver:	Electronic driver in standard, DALI on request
Emergency unit:	Standard or DALI emergency unit on request
Movement sensor:	on request
Daylight control sensor:	on request
Operating temperature range:	0°C... +40°C
IP Class:	IP20 in standard
Power:	220-240V 50/60Hz
Lighting direction:	Direct, direct / indirect
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	White acrylic diffuser [WD] in standard any other diffuser on request
General data:	5 Years standard warranty Different lumen output or wattage available on request All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.

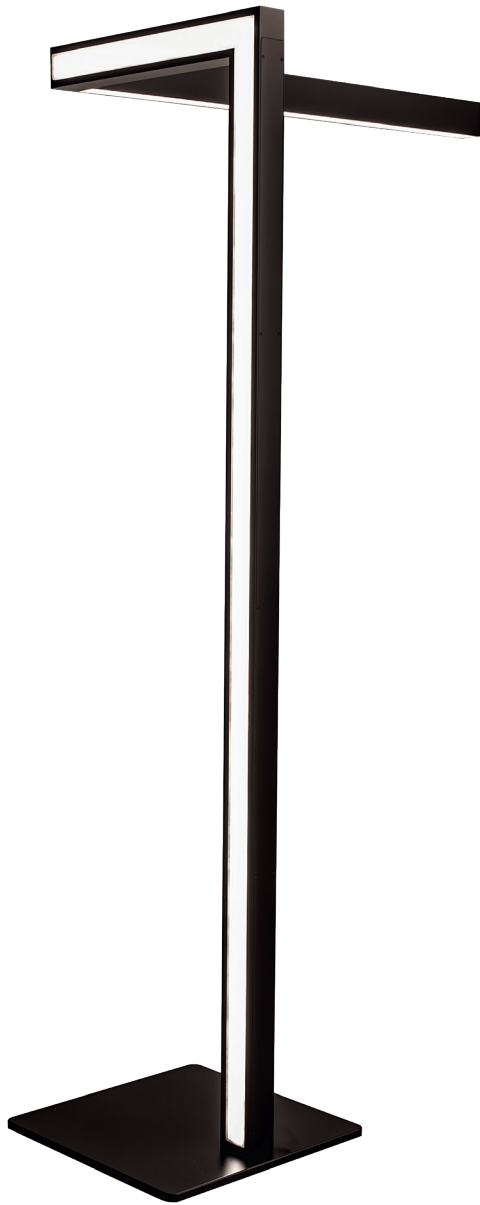

Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
7569.14000/830	9000	14000	106	85	3000	Ra > 80	50.000	3	35
7569.14000/840	9000	14000	106	85	4000	Ra > 80	50.000	3	35

