


LWN AP 3 PL NEW

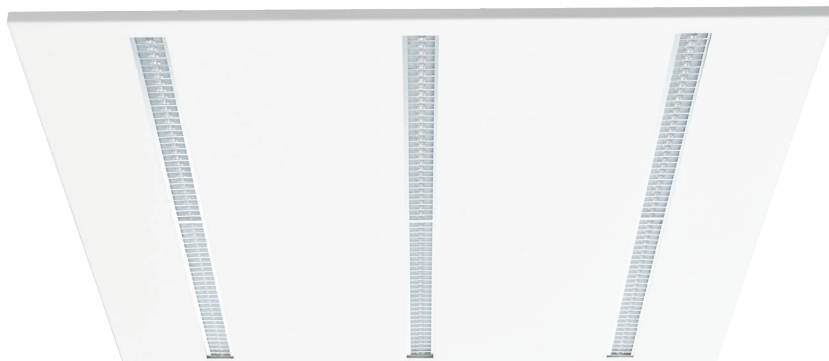

Recessed LED luminaire for installation in modular suspended ceilings, version for gypsum ceiling on request.

- Mounting:** Modular ceiling lay in type in standard.
- Body material:** Steel and aluminium
- Colour:** Standard White RAL 9016, other RAL colours on request (please add RAL colour after index number)
- LED module:** Signify (Philips), Osram, Tridonic or equivalent LED module included
- Colour temperature:** 3000 / 4000K, other on request
- Colour Rendering Index (CRI)** >80 in standard, >90 on request
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** On request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting
- Reflector type:** Aluminium glossy or mat
- Light distribution:** Symmetric
- Diffuser:** Aluminium louvers
- General data:** 5 Years standard warranty

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
6346.6600/830	6000	6600	136	44	3000	Ra > 80	50.000	3	6,20
6346.6600/840	6000	6600	136	44	4000	Ra > 80	50.000	3	6,20

