


NANO PARK

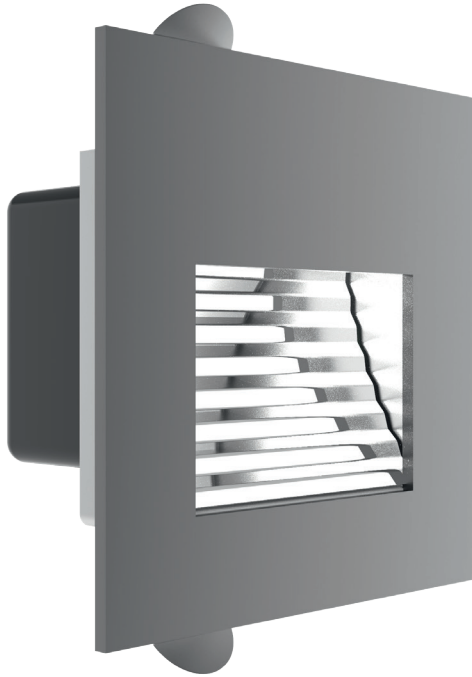

Wall mounted LED luminaire

- Mounting:** Wall recessed
- Body material:** Steel and aluminium
- Colour:** Standard White RAL 9016, other RAL colours on request (please add RAL code after index number)
- LED module:** LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI):** >80
- Driver:** Electronic driver included
- Emergency unit:** N/A
- Movement sensor:** N/A
- Daylight control sensor:** N/A
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct
- Reflector type:** N/A
- Light distribution:** Asymmetric
- General data:** 3 Years standard warranty

Different lumen output or wattage available on request

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.

IP20 220-240 V 50-60 Hz



Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
6516.140/830	70	140	23	3	3000	Ra > 80	30.000	3	0,40
6516.140/840	70	140	23	3	4000	Ra > 80	30.000	3	0,40

