


PLAFO 1150 RE LED

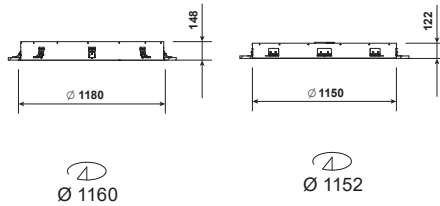

Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
Standard with trim									
6579.21000/830	18000	21000	133	135	3000	Ra > 80	50.000	3	15,00
6579.21000/840	18000	21000	133	135	4000	Ra > 80	50.000	3	15,00
Trimless version									
6580.21000/830	18000	21000	133	135	3000	Ra > 80	50.000	3	15,00
6580.21000/840	18000	21000	133	135	4000	Ra > 80	50.000	3	15,00

Recessed LED downlight for installation in suspended ceilings.

- Mounting:** Ceiling recessed with visible trim index nr. 6579 or trimless version - index nr. 6580, mounting brackets included
- Body material:** Steel and aluminium
- Colour:** Standard White RAL 9016, other RAL colours on request (please add RAL colour after index number)
- LED module:** Signify (Philips), Osram, Tridonic or equivalent LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI)** >80 in standard
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** On request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20 in standard, IP44 on request
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting
- Reflector type:** Aluminium white
- Light distribution:** Symmetric
- Diffuser:** [WD] white opalic in standard, Microprismatic [MPR] on request
- General data:** 5 Years standard warranty

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffusor and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



PLAFO 1150 RE LED trimless version.
Index no. 6580



PLAFO 1150 RE LED trimless version - mounted in the ceiling



PLAFO 1150 RE LED - mounted in the ceiling