



PROLINE 40

Surface mounted or suspended LED luminaire with direct or direct/indirect lighting. All accessories such as end caps, linear connectors, quick connectors, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems. Bespoke lengths of lighting lines available on request.



Mounting:	Directly on the surface or suspended
Body material:	Aluminium profile
Colour:	Standard White RAL 9016, other RAL colours on request (please add RAL colour after index number)
LED module:	Signify (Philips), Osram, Tridonic or equivalent LED module included
Colour temperature:	3000/4000K, other on request
Colour Rendering Index (CRI):	>80 in standard, other on request
Diffuser:	OP (Opal), MP19 (Microprismatic with UGR<19)
Driver:	EVG/DALI on request
Emergency unit:	On request
Movement sensor:	On request
Daylight control sensor:	On request
Operating temperature range:	0°C ... +40°C
IP Class:	IP20 in standard, IP44 on request
Power:	220-240V 50/60Hz
Lighting direction:	Direct or direct/indirect lighting
Reflector type:	White
Light distribution:	Symmetric
General data:	5 Years standard warranty

IP20

220-240 V
50-60 Hz



Drawing



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



Zigbee



Bluetooth

Different lumen output or wattage available on request


All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.

Available versions




PROLINE 40 TYPE S DN - STANDALONE PROFILES


Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett weight [kg]
PROFILE Type S DN (single profile) light down, ceiling mounted or suspended (end caps, ceiling mounting brackets and suspension sets to be ordered separately)										
10.00049.83.E.OP	PROLINE 40 S DN 2200 lm/830/E/OP	2200	1650	14	118	3000	581	40	80	1,2
10.00049.84.E.OP	PROLINE 40 S DN 2200 lm/840/E/OP	2200	1650	14	118	4000	581	40	80	1,2
10.00050.83.E.OP	PROLINE 40 S DN 3300 lm/830/E/OP	3300	2475	20	124	3000	862	40	80	1,7
10.00050.84.E.OP	PROLINE 40 S DN 3300 lm/840/E/OP	3300	2475	20	124	4000	862	40	80	1,7
10.00051.83.E.OP	PROLINE 40 S DN 4400 lm/830/E/OP	4400	3300	26	127	3000	1143	40	80	2,4
10.00051.84.E.OP	PROLINE 40 S DN 4400 lm/840/E/OP	4400	3300	26	127	4000	1143	40	80	2,4
10.00052.83.E.OP	PROLINE 40 S DN 5500 lm/830/E/OP	5500	4125	33	125	3000	1424	40	80	3,1
10.00052.84.E.OP	PROLINE 40 S DN 5500 lm/840/E/OP	5500	4125	33	125	4000	1424	40	80	3,1
10.00053.83.E.OP	PROLINE 40 S DN 6600 lm/830/E/OP	6600	4950	39	127	3000	1705	40	80	3,5
10.00053.84.E.OP	PROLINE 40 S DN 6600 lm/840/E/OP	6600	4950	39	127	4000	1705	40	80	3,5
10.00054.83.E.OP	PROLINE 40 S DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1986	40	80	3,9
10.00054.84.E.OP	PROLINE 40 S DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1986	40	80	3,9
10.00055.83.E.OP	PROLINE 40 S DN 8800 lm/830/E/OP	8800	6600	52	127	3000	2267	40	80	4,4
10.00055.84.E.OP	PROLINE 40 S DN 8800 lm/840/E/OP	8800	6600	52	127	4000	2267	40	80	4,4
10.00056.83.E.OP	PROLINE 40 S DN 9900 lm/830/E/OP	9900	7425	58	128	3000	2548	40	80	5,1
10.00056.84.E.OP	PROLINE 40 S DN 9900 lm/840/E/OP	9900	7425	58	128	4000	2548	40	80	5,1
10.00057.83.E.OP	PROLINE 40 S DN 11000 lm/830/E/OP	11000	8250	64	129	3000	2829	40	80	5,7
10.00057.84.E.OP	PROLINE 40 S DN 11000 lm/840/E/OP	11000	8250	64	129	4000	2829	40	80	5,7
10.00049.83.E.MP19	PROLINE 40 S DN 2200 lm/830/E/MP19	2200	1650	14	118	3000	581	40	80	1,2
10.00049.84.E.MP19	PROLINE 40 S DN 2200 lm/840/E/MP19	2200	1650	14	118	4000	581	40	80	1,2
10.00050.83.E.MP19	PROLINE 40 S DN 3300 lm/830/E/MP19	3300	2475	20	124	3000	862	40	80	1,7
10.00050.84.E.MP19	PROLINE 40 S DN 3300 lm/840/E/MP19	3300	2475	20	124	4000	862	40	80	1,7
10.00051.83.E.MP19	PROLINE 40 S DN 4400 lm/830/E/MP19	4400	3300	26	127	3000	1143	40	80	2,4
10.00051.84.E.MP19	PROLINE 40 S DN 4400 lm/840/E/MP19	4400	3300	26	127	4000	1143	40	80	2,4
10.00052.83.E.MP19	PROLINE 40 S DN 5500 lm/830/E/MP19	5500	4125	33	125	3000	1424	40	80	3,1
10.00052.84.E.MP19	PROLINE 40 S DN 5500 lm/840/E/MP19	5500	4125	33	125	4000	1424	40	80	3,1
10.00053.83.E.MP19	PROLINE 40 S DN 6600 lm/830/E/MP19	6600	4950	39	127	3000	1705	40	80	3,5
10.00053.84.E.MP19	PROLINE 40 S DN 6600 lm/840/E/MP19	6600	4950	39	127	4000	1705	40	80	3,5
10.00054.83.E.MP19	PROLINE 40 S DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1986	40	80	3,9
10.00054.84.E.MP19	PROLINE 40 S DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1986	40	80	3,9
10.00055.83.E.MP19	PROLINE 40 S DN 8800 lm/830/E/MP19	8800	6600	52	127	3000	2267	40	80	4,4
10.00055.84.E.MP19	PROLINE 40 S DN 8800 lm/840/E/MP19	8800	6600	52	127	4000	2267	40	80	4,4
10.00056.83.E.MP19	PROLINE 40 S DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	2548	40	80	5,1
10.00056.84.E.MP19	PROLINE 40 S DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	2548	40	80	5,1
10.00057.83.E.MP19	PROLINE 40 S DN 11000 lm/830/E/MP19	11000	8250	64	129	3000	2829	40	80	5,7
10.00057.84.E.MP19	PROLINE 40 S DN 11000 lm/840/E/MP19	11000	8250	64	129	4000	2829	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74


Suspended version

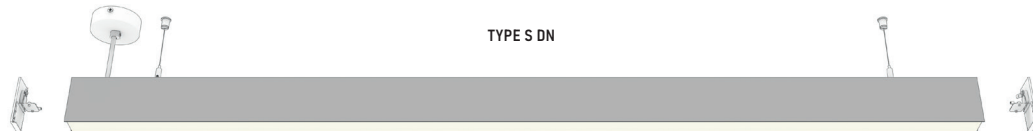

Surface mounted version




Available versions




PROLINE 40 TYPE S UP/DN - STANDALONE PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type S UP/DN (single profile) light up/down - suspended mounting only (end caps and suspension set to be orderd separately)										
10.00059.83.E.OP	PROLINE 40 S UP/DN 3300 lm/830/E/OP	3300	2475	20	124	3000	581	40	80	1,2
10.00059.84.E.OP	PROLINE 40 S UP/DN 3300 lm/840/E/OP	3300	2475	20	124	4000	581	40	80	1,2
10.00060.83.E.OP	PROLINE 40 S UP/DN 5500 lm/830/E/OP	5500	4125	33	125	3000	862	40	80	1,7
10.00060.84.E.OP	PROLINE 40 S UP/DN 5500 lm/840/E/OP	5500	4125	33	125	4000	862	40	80	1,7
10.00061.83.E.OP	PROLINE 40 S UP/DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1143	40	80	2,4
10.00061.84.E.OP	PROLINE 40 S UP/DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1143	40	80	2,4
10.00062.83.E.OP	PROLINE 40 S UP/DN 9900 lm/830/E/OP	9900	7425	58	128	3000	1424	40	80	3,1
10.00062.84.E.OP	PROLINE 40 S UP/DN 9900 lm/840/E/OP	9900	7425	58	128	4000	1424	40	80	3,1
10.00063.83.E.OP	PROLINE 40 S UP/DN 12100 lm/830/E/OP	12100	9075	72	126	3000	1705	40	80	3,5
10.00063.84.E.OP	PROLINE 40 S UP/DN 12100 lm/840/E/OP	12100	9075	72	126	4000	1705	40	80	3,5
10.00064.83.E.OP	PROLINE 40 S UP/DN 14300 lm/830/E/OP	14300	10725	85	126	3000	1986	40	80	3,9
10.00064.84.E.OP	PROLINE 40 S UP/DN 14300 lm/840/E/OP	14300	10725	85	126	4000	1986	40	80	3,9
10.00065.83.E.OP	PROLINE 40 S UP/DN 16500 lm/830/E/OP	16500	12375	98	126	3000	2267	40	80	4,4
10.00065.84.E.OP	PROLINE 40 S UP/DN 16500 lm/840/E/OP	16500	12375	98	126	4000	2267	40	80	4,4
10.00066.83.E.OP	PROLINE 40 S UP/DN 18700 lm/830/E/OP	18700	14025	110	128	3000	2548	40	80	5,1
10.00066.84.E.OP	PROLINE 40 S UP/DN 18700 lm/840/E/OP	18700	14025	110	128	4000	2548	40	80	5,1
10.00067.83.E.OP	PROLINE 40 S UP/DN 20900 lm/830/E/OP	20900	15675	124	126	3000	2829	40	80	5,7
10.00067.84.E.OP	PROLINE 40 S UP/DN 20900 lm/840/E/OP	20900	15675	124	126	4000	2829	40	80	5,7
10.00059.83.E.MP19	PROLINE 40 S UP/DN 3300 lm/830/E/MP19	3300	2475	20	124	3000	581	40	80	1,2
10.00059.84.E.MP19	PROLINE 40 S UP/DN 3300 lm/840/E/MP19	3300	2475	20	124	4000	581	40	80	1,2
10.00060.83.E.MP19	PROLINE 40 S UP/DN 5500 lm/830/E/MP19	5500	4125	33	125	3000	862	40	80	1,7
10.00060.84.E.MP19	PROLINE 40 S UP/DN 5500 lm/840/E/MP19	5500	4125	33	125	4000	862	40	80	1,7
10.00061.83.E.MP19	PROLINE 40 S UP/DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1143	40	80	2,4
10.00061.84.E.MP19	PROLINE 40 S UP/DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1143	40	80	2,4
10.00062.83.E.MP19	PROLINE 40 S UP/DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	1424	40	80	3,1
10.00062.84.E.MP19	PROLINE 40 S UP/DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	1424	40	80	3,1
10.00063.83.E.MP19	PROLINE 40 S UP/DN 12100 lm/830/E/MP19	12100	9075	72	126	3000	1705	40	80	3,5
10.00063.84.E.MP19	PROLINE 40 S UP/DN 12100 lm/840/E/MP19	12100	9075	72	126	4000	1705	40	80	3,5
10.00064.83.E.MP19	PROLINE 40 S UP/DN 14300 lm/830/E/MP19	14300	10725	85	126	3000	1986	40	80	3,9
10.00064.84.E.MP19	PROLINE 40 S UP/DN 14300 lm/840/E/MP19	14300	10725	85	126	4000	1986	40	80	3,9
10.00065.83.E.MP19	PROLINE 40 S UP/DN 16500 lm/830/E/MP19	16500	12375	98	126	3000	2267	40	80	4,4
10.00065.84.E.MP19	PROLINE 40 S UP/DN 16500 lm/840/E/MP19	16500	12375	98	126	4000	2267	40	80	4,4
10.00066.83.E.MP19	PROLINE 40 S UP/DN 18700 lm/830/E/MP19	18700	14025	110	128	3000	2548	40	80	5,1
10.00066.84.E.MP19	PROLINE 40 S UP/DN 18700 lm/840/E/MP19	18700	14025	110	128	4000	2548	40	80	5,1
10.00067.83.E.MP19	PROLINE 40 S UP/DN 20900 lm/830/E/MP19	20900	15675	124	126	3000	2829	40	80	5,7
10.00067.84.E.MP19	PROLINE 40 S UP/DN 20900 lm/840/E/MP19	20900	15675	124	126	4000	2829	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74

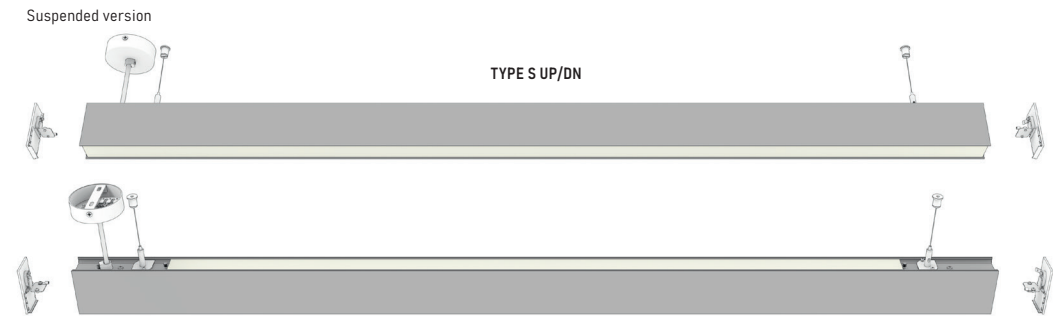

Available versions



PROLINE 40 TYPE SE DN - SYSTEM PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type SE DN (start/end section) light down, ceiling mounted or suspended (end caps, ceiling mounting brackets and suspension sets to be ordered separately)										
10.00070.83.E.OP	PROLINE 40 SE DN 2200 lm/830/E/OP	2200	1650	14	118	3000	572	40	80	1,2
10.00070.84.E.OP	PROLINE 40 SE DN 2200 lm/840/E/OP	2200	1650	14	118	4000	572	40	80	1,2
10.00071.83.E.OP	PROLINE 40 SE DN 3300 lm/830/E/OP	3300	2475	20	124	3000	853	40	80	1,7
10.00071.84.E.OP	PROLINE 40 SE DN 3300 lm/840/E/OP	3300	2475	20	124	4000	853	40	80	1,7
10.00072.83.E.OP	PROLINE 40 SE DN 4400 lm/830/E/OP	4400	3300	26	127	3000	1134	40	80	2,4
10.00072.84.E.OP	PROLINE 40 SE DN 4400 lm/840/E/OP	4400	3300	26	127	4000	1134	40	80	2,4
10.00073.83.E.OP	PROLINE 40 SE DN 5500 lm/830/E/OP	5500	4125	33	125	3000	1415	40	80	3,1
10.00073.84.E.OP	PROLINE 40 SE DN 5500 lm/840/E/OP	5500	4125	33	125	4000	1415	40	80	3,1
10.00074.83.E.OP	PROLINE 40 SE DN 6600 lm/830/E/OP	6600	4950	39	127	3000	1696	40	80	3,5
10.00074.84.E.OP	PROLINE 40 SE DN 6600 lm/840/E/OP	6600	4950	39	127	4000	1696	40	80	3,5
10.00075.83.E.OP	PROLINE 40 SE DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1977	40	80	3,9
10.00075.84.E.OP	PROLINE 40 SE DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1977	40	80	3,9
10.00076.83.E.OP	PROLINE 40 SE DN 8800 lm/830/E/OP	8800	6600	52	127	3000	2258	40	80	4,4
10.00076.84.E.OP	PROLINE 40 SE DN 8800 lm/840/E/OP	8800	6600	52	127	4000	2258	40	80	4,4
10.00077.83.E.OP	PROLINE 40 SE DN 9900 lm/830/E/OP	9900	7425	58	128	3000	2539	40	80	5,1
10.00077.84.E.OP	PROLINE 40 SE DN 9900 lm/840/E/OP	9900	7425	58	128	4000	2539	40	80	5,1
10.00078.83.E.OP	PROLINE 40 SE DN 11000 lm/830/E/OP	11000	8250	64	129	3000	2820	40	80	5,7
10.00078.84.E.OP	PROLINE 40 SE DN 11000 lm/840/E/OP	11000	8250	64	129	4000	2820	40	80	5,7
10.00070.83.E.MP19	PROLINE 40 SE DN 2200 lm/830/E/MP19	2200	1650	14	118	3000	572	40	80	1,2
10.00070.84.E.MP19	PROLINE 40 SE DN 2200 lm/840/E/MP19	2200	1650	14	118	4000	572	40	80	1,2
10.00071.83.E.MP19	PROLINE 40 SE DN 3300 lm/830/E/MP19	3300	2475	20	124	3000	853	40	80	1,7
10.00071.84.E.MP19	PROLINE 40 SE DN 3300 lm/840/E/MP19	3300	2475	20	124	4000	853	40	80	1,7
10.00072.83.E.MP19	PROLINE 40 SE DN 4400 lm/830/E/MP19	4400	3300	26	127	3000	1134	40	80	2,4
10.00072.84.E.MP19	PROLINE 40 SE DN 4400 lm/840/E/MP19	4400	3300	26	127	4000	1134	40	80	2,4
10.00073.83.E.MP19	PROLINE 40 SE DN 5500 lm/830/E/MP19	5500	4125	33	125	3000	1415	40	80	3,1
10.00073.84.E.MP19	PROLINE 40 SE DN 5500 lm/840/E/MP19	5500	4125	33	125	4000	1415	40	80	3,1
10.00074.83.E.MP19	PROLINE 40 SE DN 6600 lm/830/E/MP19	6600	4950	39	127	3000	1696	40	80	3,5
10.00074.84.E.MP19	PROLINE 40 SE DN 6600 lm/840/E/MP19	6600	4950	39	127	4000	1696	40	80	3,5
10.00075.83.E.MP19	PROLINE 40 SE DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1977	40	80	3,9
10.00075.84.E.MP19	PROLINE 40 SE DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1977	40	80	3,9
10.00076.83.E.MP19	PROLINE 40 SE DN 8800 lm/830/E/MP19	8800	6600	52	127	3000	2258	40	80	4,4
10.00076.84.E.MP19	PROLINE 40 SE DN 8800 lm/840/E/MP19	8800	6600	52	127	4000	2258	40	80	4,4
10.00077.83.E.MP19	PROLINE 40 SE DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	2539	40	80	5,1
10.00077.84.E.MP19	PROLINE 40 SE DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	2539	40	80	5,1
10.00078.83.E.MP19	PROLINE 40 SE DN 11000 lm/830/E/MP19	11000	8250	64	129	3000	2820	40	80	5,7
10.00078.84.E.MP19	PROLINE 40 SE DN 11000 lm/840/E/MP19	11000	8250	64	129	4000	2820	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74


Suspended version



Surface mounted version




Available versions




PROLINE 40 TYPE M DN - SYSTEM PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type M DN (middle section) light down, ceiling mounted or suspended (ceiling mounting brackets and suspension sets to be ordered separately)										
10.00680.83.E.OP	PROLINE 40 M DN 4400 lm/830/E/OP	4400	3300	26	127	3000	1124	40	80	2,4
10.00680.84.E.OP	PROLINE 40 M DN 4400 lm/840/E/OP	4400	3300	26	127	4000	1124	40	80	2,4
10.00681.83.E.OP	PROLINE 40 M DN 5500 lm/830/E/OP	5500	4125	33	125	3000	1405	40	80	3,1
10.00681.84.E.OP	PROLINE 40 M DN 5500 lm/840/E/OP	5500	4125	33	125	4000	1405	40	80	3,1
10.00682.83.E.OP	PROLINE 40 M DN 6600 lm/830/E/OP	6600	4950	39	127	3000	1686	40	80	3,5
10.00682.84.E.OP	PROLINE 40 M DN 6600 lm/840/E/OP	6600	4950	39	127	4000	1686	40	80	3,5
10.00080.83.E.OP	PROLINE 40 M DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1967	40	80	3,9
10.00080.84.E.OP	PROLINE 40 M DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1967	40	80	3,9
10.00081.83.E.OP	PROLINE 40 M DN 8800 lm/830/E/OP	8800	6600	52	127	3000	2248	40	80	4,4
10.00081.84.E.OP	PROLINE 40 M DN 8800 lm/840/E/OP	8800	6600	52	127	4000	2248	40	80	4,4
10.00082.83.E.OP	PROLINE 40 M DN 9900 lm/830/E/OP	9900	7425	58	128	3000	2529	40	80	5,1
10.00082.84.E.OP	PROLINE 40 M DN 9900 lm/840/E/OP	9900	7425	58	128	4000	2529	40	80	5,1
10.00083.83.E.OP	PROLINE 40 M DN 11000 lm/830/E/OP	11000	8250	64	129	3000	2810	40	80	5,7
10.00083.84.E.OP	PROLINE 40 M DN 11000 lm/840/E/OP	11000	8250	64	129	4000	2810	40	80	5,7
10.00680.83.E.MP19	PROLINE 40 M DN 4400 lm/830/E/MP19	4400	3300	26	127	3000	1124	40	80	2,4
10.00680.84.E.MP19	PROLINE 40 M DN 4400 lm/840/E/MP19	4400	3300	26	127	4000	1124	40	80	2,4
10.00681.83.E.MP19	PROLINE 40 M DN 5500 lm/830/E/MP19	5500	4125	33	125	3000	1405	40	80	3,1
10.00681.84.E.MP19	PROLINE 40 M DN 5500 lm/840/E/MP19	5500	4125	33	125	4000	1405	40	80	3,1
10.00682.83.E.MP19	PROLINE 40 M DN 6600 lm/830/E/MP19	6600	4950	39	127	3000	1686	40	80	3,5
10.00682.84.E.MP19	PROLINE 40 M DN 6600 lm/840/E/MP19	6600	4950	39	127	4000	1686	40	80	3,5
10.00080.83.E.MP19	PROLINE 40 M DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1967	40	80	3,9
10.00080.84.E.MP19	PROLINE 40 M DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1967	40	80	3,9
10.00081.83.E.MP19	PROLINE 40 M DN 8800 lm/830/E/MP19	8800	6600	52	127	3000	2248	40	80	4,4
10.00081.84.E.MP19	PROLINE 40 M DN 8800 lm/840/E/MP19	8800	6600	52	127	4000	2248	40	80	4,4
10.00082.83.E.MP19	PROLINE 40 M DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	2529	40	80	5,1
10.00082.84.E.MP19	PROLINE 40 M DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	2529	40	80	5,1
10.00083.83.E.MP19	PROLINE 40 M DN 11000 lm/830/E/MP19	11000	8250	64	129	3000	2810	40	80	5,7
10.00083.84.E.MP19	PROLINE 40 M DN 11000 lm/840/E/MP19	11000	8250	64	129	4000	2810	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74

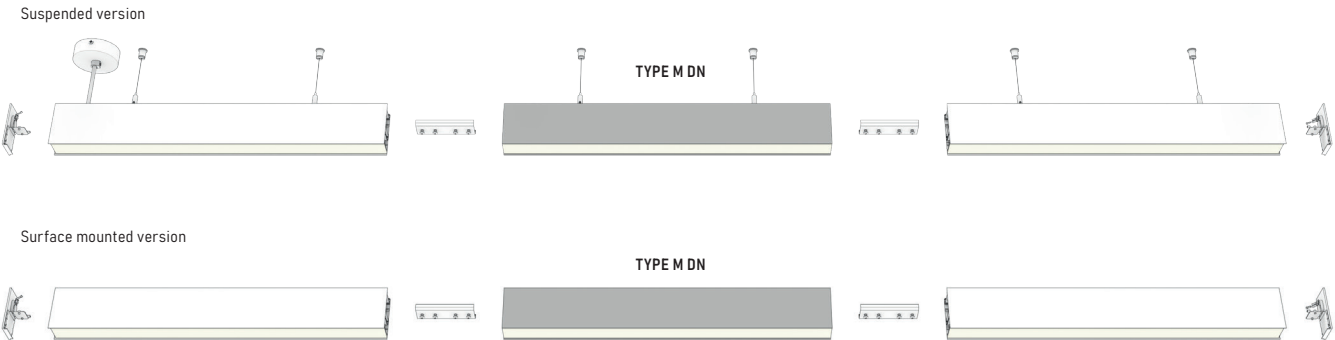

Available versions




PROLINE 40 DN SYSTEM COUPLERS

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type L DN (light down) ceiling mounted or suspended (ceiling mounting brackets and suspension sets to be ordered separately)										
10.00119.83.E.OP	PROLINE 40 L DN 4400 lm/830/E/OP	4400	3300	26	127	3000	592	592	80	2,4
10.00119.84.E.OP	PROLINE 40 L DN 4400 lm/840/E/OP	4400	3300	26	127	4000	592	592	80	2,4
10.00119.83.E.MP19	PROLINE 40 L DN 4400 lm/830/E/MP19	4400	3300	26	127	3000	592	592	80	2,4
10.00119.84.E.MP19	PROLINE 40 L DN 4400 lm/840/E/MP19	4400	3300	26	127	4000	592	592	80	2,4


Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type T DN (light down) ceiling mounted or suspended (ceiling mounting brackets and suspension sets to be ordered separately)										
10.00120.83.E.OP	PROLINE 40 T DN 6600 lm/830/E/OP	6600	4950	39	127	3000	1144	592	80	3,5
10.00120.84.E.OP	PROLINE 40 T DN 6600 lm/840/E/OP	6600	4950	39	127	4000	1144	592	80	3,5
10.00120.83.E.MP19	PROLINE 40 T DN 6600 lm/830/E/MP19	6600	4950	39	127	3000	1144	592	80	3,5
10.00120.84.E.MP19	PROLINE 40 T DN 6600 lm/840/E/MP19	6600	4950	39	127	4000	1144	592	80	3,5

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type X DN (light down) ceiling mounted or suspended (ceiling mounting brackets and suspension sets to be ordered separately)										
10.00121.83.E.OP	PROLINE 40 X DN 8800 lm/830/E/OP	8800	6600	52	127	3000	1144	1144	80	4,4
10.00121.84.E.OP	PROLINE 40 X DN 8800 lm/840/E/OP	8800	6600	52	127	4000	1144	1144	80	4,4
10.00121.83.E.MP19	PROLINE 40 X DN 8800 lm/830/E/MP19	8800	6600	52	127	3000	1144	1144	80	4,4
10.00121.84.E.MP19	PROLINE 40 X DN 8800 lm/840/E/MP19	8800	6600	52	127	4000	1144	1144	80	4,4


Couplers






PROLINE 40 system coupler type L DN




PROLINE 40 system coupler type T DN



PROLINE 40 system coupler type X DN



Available versions




PROLINE 40 TYPE SE UP/DN - SYSTEM PROFILES


Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type SE UP/DN (start/end section) light up/down - suspended mounting only (end caps and suspension set to be orderd separately)										
10.00090.83.E.OP	PROLINE 40 SE UP/DN 3300 lm/830/E/OP	3300	2475	20	124	3000	572	40	80	1,2
10.00090.84.E.OP	PROLINE 40 SE UP/DN 3300 lm/840/E/OP	3300	2475	20	124	4000	572	40	80	1,2
10.00091.83.E.OP	PROLINE 40 SE UP/DN 5500 lm/830/E/OP	5500	4125	33	125	3000	853	40	80	1,7
10.00091.84.E.OP	PROLINE 40 SE UP/DN 5500 lm/840/E/OP	5500	4125	33	125	4000	853	40	80	1,7
10.00092.83.E.OP	PROLINE 40 SE UP/DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1134	40	80	2,4
10.00092.84.E.OP	PROLINE 40 SE UP/DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1134	40	80	2,4
10.00093.83.E.OP	PROLINE 40 SE UP/DN 9900 lm/830/E/OP	9900	7425	58	128	3000	1415	40	80	3,1
10.00093.84.E.OP	PROLINE 40 SE UP/DN 9900 lm/840/E/OP	9900	7425	58	128	4000	1415	40	80	3,1
10.00094.83.E.OP	PROLINE 40 SE UP/DN 12100 lm/830/E/OP	12100	9075	72	126	3000	1696	40	80	3,5
10.00094.84.E.OP	PROLINE 40 SE UP/DN 12100 lm/840/E/OP	12100	9075	72	126	4000	1696	40	80	3,5
10.00095.83.E.OP	PROLINE 40 SE UP/DN 14300 lm/830/E/OP	14300	10725	85	126	3000	1977	40	80	3,9
10.00095.84.E.OP	PROLINE 40 SE UP/DN 14300 lm/840/E/OP	14300	10725	85	126	4000	1977	40	80	3,9
10.00096.83.E.OP	PROLINE 40 SE UP/DN 16500 lm/830/E/OP	16500	12375	98	126	3000	2258	40	80	4,4
10.00096.84.E.OP	PROLINE 40 SE UP/DN 16500 lm/840/E/OP	16500	12375	98	126	4000	2258	40	80	4,4
10.00097.83.E.OP	PROLINE 40 SE UP/DN 18700 lm/830/E/OP	18700	14025	110	128	3000	2539	40	80	5,1
10.00097.84.E.OP	PROLINE 40 SE UP/DN 18700 lm/840/E/OP	18700	14025	110	128	4000	2539	40	80	5,1
10.00098.83.E.OP	PROLINE 40 SE UP/DN 20900 lm/830/E/OP	20900	15675	124	126	3000	2820	40	80	5,7
10.00098.84.E.OP	PROLINE 40 SE UP/DN 20900 lm/840/E/OP	20900	15675	124	126	4000	2820	40	80	5,7
10.00090.83.E.MP19	PROLINE 40 SE UP/DN 3300 lm/830/E/MP19	3300	2475	20	124	3000	572	40	80	1,2
10.00090.84.E.MP19	PROLINE 40 SE UP/DN 3300 lm/840/E/MP19	3300	2475	20	124	4000	572	40	80	1,2
10.00091.83.E.MP19	PROLINE 40 SE UP/DN 5500 lm/830/E/MP19	5500	4125	33	125	3000	853	40	80	1,7
10.00091.84.E.MP19	PROLINE 40 SE UP/DN 5500 lm/840/E/MP19	5500	4125	33	125	4000	853	40	80	1,7
10.00092.83.E.MP19	PROLINE 40 SE UP/DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1134	40	80	2,4
10.00092.84.E.MP19	PROLINE 40 SE UP/DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1134	40	80	2,4
10.00093.83.E.MP19	PROLINE 40 SE UP/DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	1415	40	80	3,1
10.00093.84.E.MP19	PROLINE 40 SE UP/DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	1415	40	80	3,1
10.00094.83.E.MP19	PROLINE 40 SE UP/DN 12100 lm/830/E/MP19	12100	9075	72	126	3000	1696	40	80	3,5
10.00094.84.E.MP19	PROLINE 40 SE UP/DN 12100 lm/840/E/MP19	12100	9075	72	126	4000	1696	40	80	3,5
10.00095.83.E.MP19	PROLINE 40 SE UP/DN 14300 lm/830/E/MP19	14300	10725	85	126	3000	1977	40	80	3,9
10.00095.84.E.MP19	PROLINE 40 SE UP/DN 14300 lm/840/E/MP19	14300	10725	85	126	4000	1977	40	80	3,9
10.00096.83.E.MP19	PROLINE 40 SE UP/DN 16500 lm/830/E/MP19	16500	12375	98	126	3000	2258	40	80	4,4
10.00096.84.E.MP19	PROLINE 40 SE UP/DN 16500 lm/840/E/MP19	16500	12375	98	126	4000	2258	40	80	4,4
10.00097.83.E.MP19	PROLINE 40 SE UP/DN 18700 lm/830/E/MP19	18700	14025	110	128	3000	2539	40	80	5,1
10.00097.84.E.MP19	PROLINE 40 SE UP/DN 18700 lm/840/E/MP19	18700	14025	110	128	4000	2539	40	80	5,1
10.00098.83.E.MP19	PROLINE 40 SE UP/DN 20900 lm/830/E/MP19	20900	15675	124	126	3000	2820	40	80	5,7
10.00098.84.E.MP19	PROLINE 40 SE UP/DN 20900 lm/840/E/MP19	20900	15675	124	126	4000	2820	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74

Suspended version

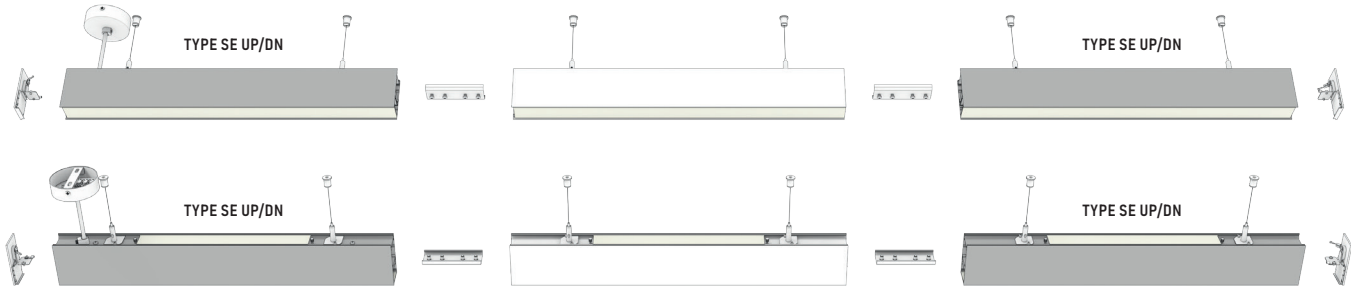

Available versions




PROLINE 40 TYPE M UP/DN - SYSTEM PROFILES


Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type M UP/DN (middle section) light up/down - suspended mounting only (suspension set to be orderd separately)										
10.00690.83.E.OP	PROLINE 40 M UP/DN 7700 lm/830/E/OP	7700	5775	46	126	3000	1124	40	80	2,4
10.00690.84.E.OP	PROLINE 40 M UP/DN 7700 lm/840/E/OP	7700	5775	46	126	4000	1124	40	80	2,4
10.00691.83.E.OP	PROLINE 40 M UP/DN 9900 lm/830/E/OP	9900	7425	58	128	3000	1405	40	80	3,1
10.00691.84.E.OP	PROLINE 40 M UP/DN 9900 lm/840/E/OP	9900	7425	58	128	4000	1405	40	80	3,1
10.00692.83.E.OP	PROLINE 40 M UP/DN 12100 lm/830/E/OP	12100	9075	72	126	3000	1686	40	80	3,5
10.00692.84.E.OP	PROLINE 40 M UP/DN 12100 lm/840/E/OP	12100	9075	72	126	4000	1686	40	80	3,5
10.00100.83.E.OP	PROLINE 40 M UP/DN 14300 lm/830/E/OP	14300	10725	85	126	3000	1967	40	80	3,9
10.00100.84.E.OP	PROLINE 40 M UP/DN 14300 lm/840/E/OP	14300	10725	85	126	4000	1967	40	80	3,9
10.00101.83.E.OP	PROLINE 40 M UP/DN 16500 lm/830/E/OP	16500	12375	98	126	3000	2248	40	80	4,4
10.00101.84.E.OP	PROLINE 40 M UP/DN 16500 lm/840/E/OP	16500	12375	98	126	4000	2248	40	80	4,4
10.00102.83.E.OP	PROLINE 40 M UP/DN 18700 lm/830/E/OP	18700	14025	110	128	3000	2529	40	80	5,1
10.00102.84.E.OP	PROLINE 40 M UP/DN 18700 lm/840/E/OP	18700	14025	110	128	4000	2529	40	80	5,1
10.00103.83.E.OP	PROLINE 40 M UP/DN 20900 lm/830/E/OP	20900	15675	124	126	3000	2810	40	80	5,7
10.00103.84.E.OP	PROLINE 40 M UP/DN 20900 lm/840/E/OP	20900	15675	124	126	4000	2810	40	80	5,7
10.00690.83.E.MP19	PROLINE 40 M UP/DN 7700 lm/830/E/MP19	7700	5775	46	126	3000	1124	40	80	2,4
10.00690.84.E.MP19	PROLINE 40 M UP/DN 7700 lm/840/E/MP19	7700	5775	46	126	4000	1124	40	80	2,4
10.00691.83.E.MP19	PROLINE 40 M UP/DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	1405	40	80	3,1
10.00691.84.E.MP19	PROLINE 40 M UP/DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	1405	40	80	3,1
10.00692.83.E.MP19	PROLINE 40 M UP/DN 12100 lm/830/E/MP19	12100	9075	72	126	3000	1686	40	80	3,5
10.00692.84.E.MP19	PROLINE 40 M UP/DN 12100 lm/840/E/MP19	12100	9075	72	126	4000	1686	40	80	3,5
10.00100.83.E.MP19	PROLINE 40 M UP/DN 14300 lm/830/E/MP19	14300	10725	85	126	3000	1967	40	80	3,9
10.00100.84.E.MP19	PROLINE 40 M UP/DN 14300 lm/840/E/MP19	14300	10725	85	126	4000	1967	40	80	3,9
10.00101.83.E.MP19	PROLINE 40 M UP/DN 16500 lm/830/E/MP19	16500	12375	98	126	3000	2248	40	80	4,4
10.00101.84.E.MP19	PROLINE 40 M UP/DN 16500 lm/840/E/MP19	16500	12375	98	126	4000	2248	40	80	4,4
10.00102.83.E.MP19	PROLINE 40 M UP/DN 18700 lm/830/E/MP19	18700	14025	110	128	3000	2529	40	80	5,1
10.00102.84.E.MP19	PROLINE 40 M UP/DN 18700 lm/840/E/MP19	18700	14025	110	128	4000	2529	40	80	5,1
10.00103.83.E.MP19	PROLINE 40 M UP/DN 20900 lm/830/E/MP19	20900	15675	124	126	3000	2810	40	80	5,7
10.00103.84.E.MP19	PROLINE 40 M UP/DN 20900 lm/840/E/MP19	20900	15675	124	126	4000	2810	40	80	5,7

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems - see page nr. 74

Suspended version

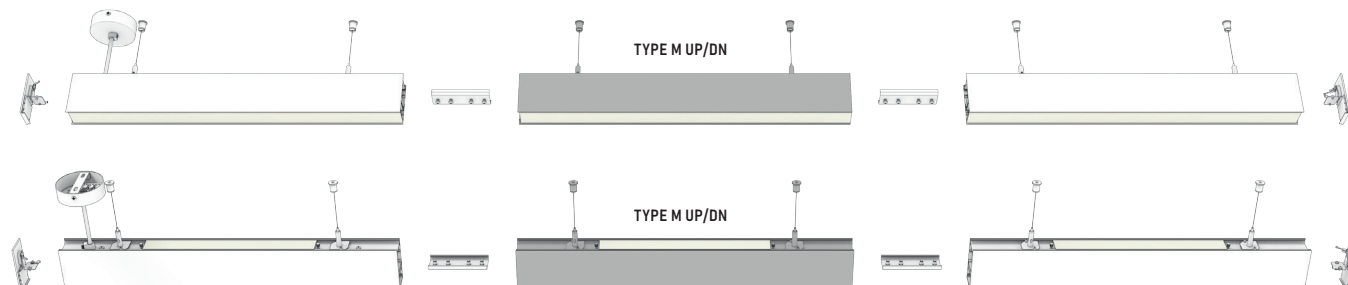

Available versions




PROLINE 40 UP/DN SYSTEM COUPLERS

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type L UP/DN (light up/down) - suspended mounting only (suspension set to be ordered separately)										
10.00122.83.E.OP	PROLINE 40 L UP/DN 6600 lm/830/E/OP	6600	4950	39	127	3000	592	592	80	2,4
10.00122.84.E.OP	PROLINE 40 L UP/DN 6600 lm/840/E/OP	6600	4950	39	127	4000	592	592	80	2,4
10.00122.83.E.MP19	PROLINE 40 L UP/DN 6600 lm/830/E/MP19	6600	4950	39	127	3000	592	592	80	2,4
10.00122.84.E.MP19	PROLINE 40 L UP/DN 6600 lm/840/E/MP19	6600	4950	39	127	4000	592	592	80	2,4



Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type T UP/DN (light up/down) - suspended mounting only (suspension set to be ordered separately)										
10.00123.83.E.OP	PROLINE 40 T UP/DN 9900 lm/830/E/OP	9900	7425	58	128	3000	1144	592	80	3,5
10.00123.84.E.OP	PROLINE 40 T UP/DN 9900 lm/840/E/OP	9900	7425	58	128	4000	1144	592	80	3,5
10.00123.83.E.MP19	PROLINE 40 T UP/DN 9900 lm/830/E/MP19	9900	7425	58	128	3000	1144	592	80	3,5
10.00123.84.E.MP19	PROLINE 40 T UP/DN 9900 lm/840/E/MP19	9900	7425	58	128	4000	1144	592	80	3,5

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 40 System connector type X UP/DN (light up/down) - suspended mounting only (suspension set to be ordered separately)										
10.00124.83.E.OP	PROLINE 40 X UP/DN 13200 lm/830/E/OP	13200	9900	78	127	3000	1144	1144	80	4,4
10.00124.84.E.OP	PROLINE 40 X UP/DN 13200 lm/840/E/OP	13200	9900	78	127	4000	1144	1144	80	4,4
10.00124.83.E.MP19	PROLINE 40 X UP/DN 13200 lm/830/E/MP19	13200	9900	78	127	3000	1144	1144	80	4,4
10.00124.84.E.MP19	PROLINE 40 X UP/DN 13200 lm/840/E/MP19	13200	9900	78	127	4000	1144	1144	80	4,4



Couplers




PROLINE 40 system coupler type L UP/DN





PROLINE 40 system coupler type T UP/DN



PROLINE 40 system coupler type X UP/DN



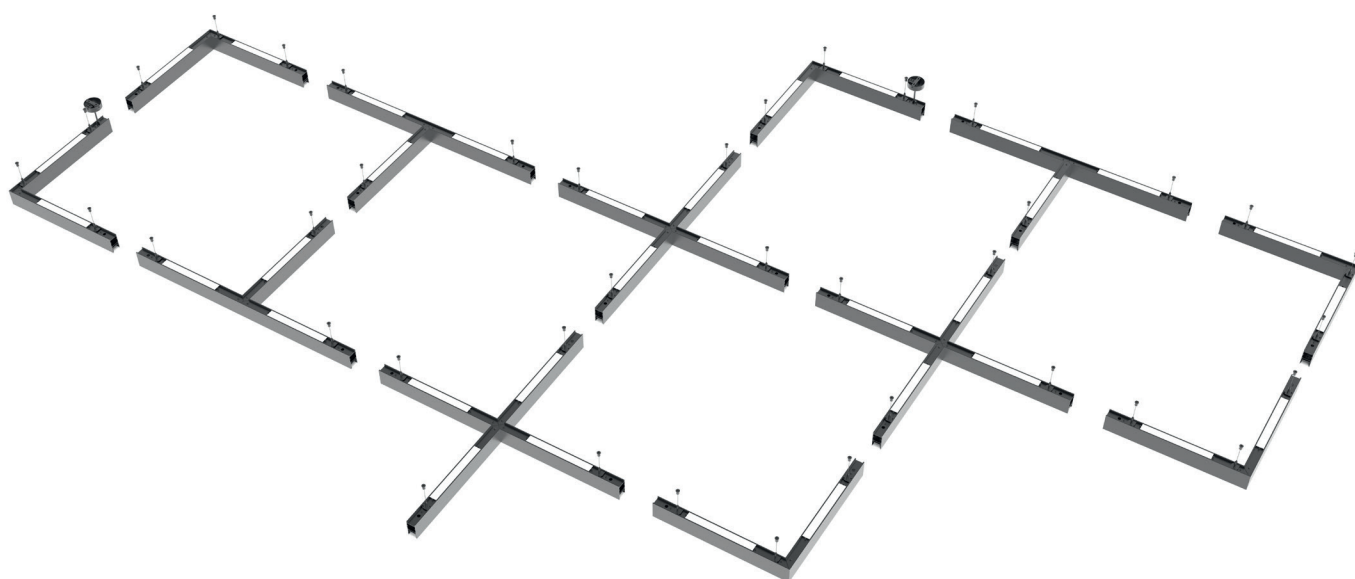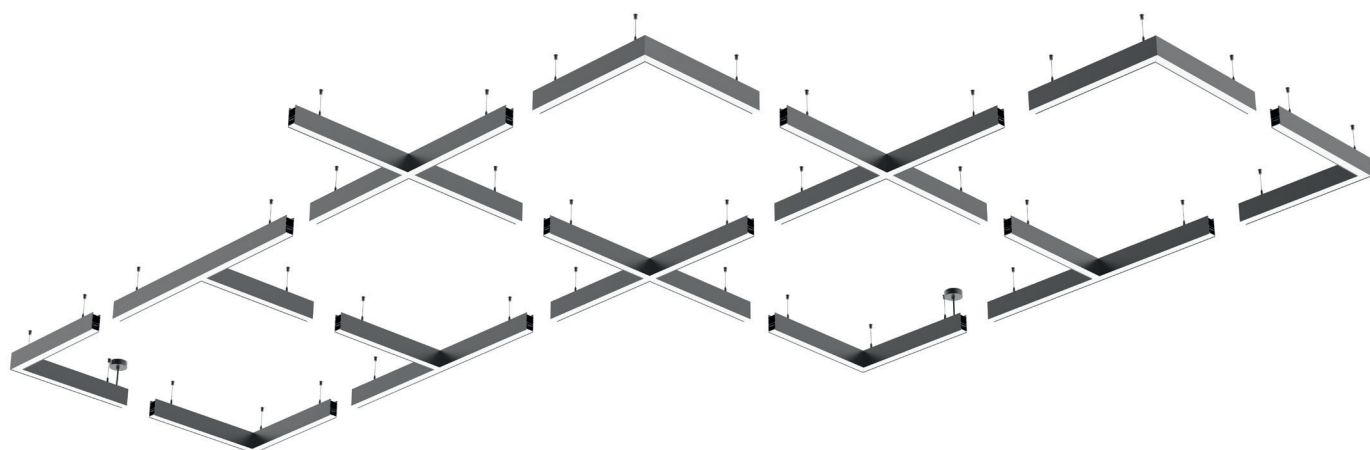

PROLINE 40 EXTRAS

Product code	Product name	Length [mm]	Width [mm]	Height [mm]
PROLINE 40 Empty				
10.00118.100	1 meter of empty PROLINE 40 profile with alu cover	1000	40	80
Accessories				
90.00110.15	Suspension for PROLINE 40 - 1,5 m long steel wire (1 piece)			
90.00111	Ceiling mounting bracket for surface mounting (1 piece)			
90.00101.15	Transparent 3 core power cable 1,5 m long, ceiling cup included			
90.00102.15	Transparent 5 core power cable 1,5 m long, ceiling cup included			
90.00107	End cap for PROLINE 40 (1 piece)			
90.00103	Linear connector for PROLINE 40			
90.00112.MF	3 pole quick connectors (Male + Female)			
90.00113.MF	5 pole quick connectors (Male + Female)			

Accessories




Suspension for PROLINE 40 - 1,5 m long steel wire (1 piece)



3 core transparent power feed, 1,5 m including ceiling base



5 core transparent power feed, 1,5 m including ceiling base



End cap for PROLINE 40 (1 piece)



Linear connector for PROLINE 40



3 pole quick connectors (Male + Female)




5 pole quick connectors (Male + Female)

Diffusers



OP (Opal)





MP19 (Microprismatic with UGR<19)



DESCRIPTION OF PROLINE SYSTEM:

- PROLINE S DN - standalone luminaires with light down (can't be connected into lighting systems)
- PROLINE S UP/DN - standalone luminaires with light up/down (can't be connected into lighting systems)
- PROLINE SE DN - system luminaire with light down (must be used at the beginning and at the end of each linear lighting system)
- PROLINE SE UP/DN - system luminaire with light up/down (must be used at the beginning and at the end of each linear lighting system)
- PROLINE M DN - system luminaire with light down (middle section to be used in between SE type profiles). Any length of lighting system can be created by using different lengths and numbers of M-type profiles between two SE-type profiles.
- PROLINE M UP/DN - system luminaire with light up/down (middle section to be used in between SE type profiles). Any length of lighting system can be created by using different lengths and numbers of M-type profiles between two SE-type profiles.

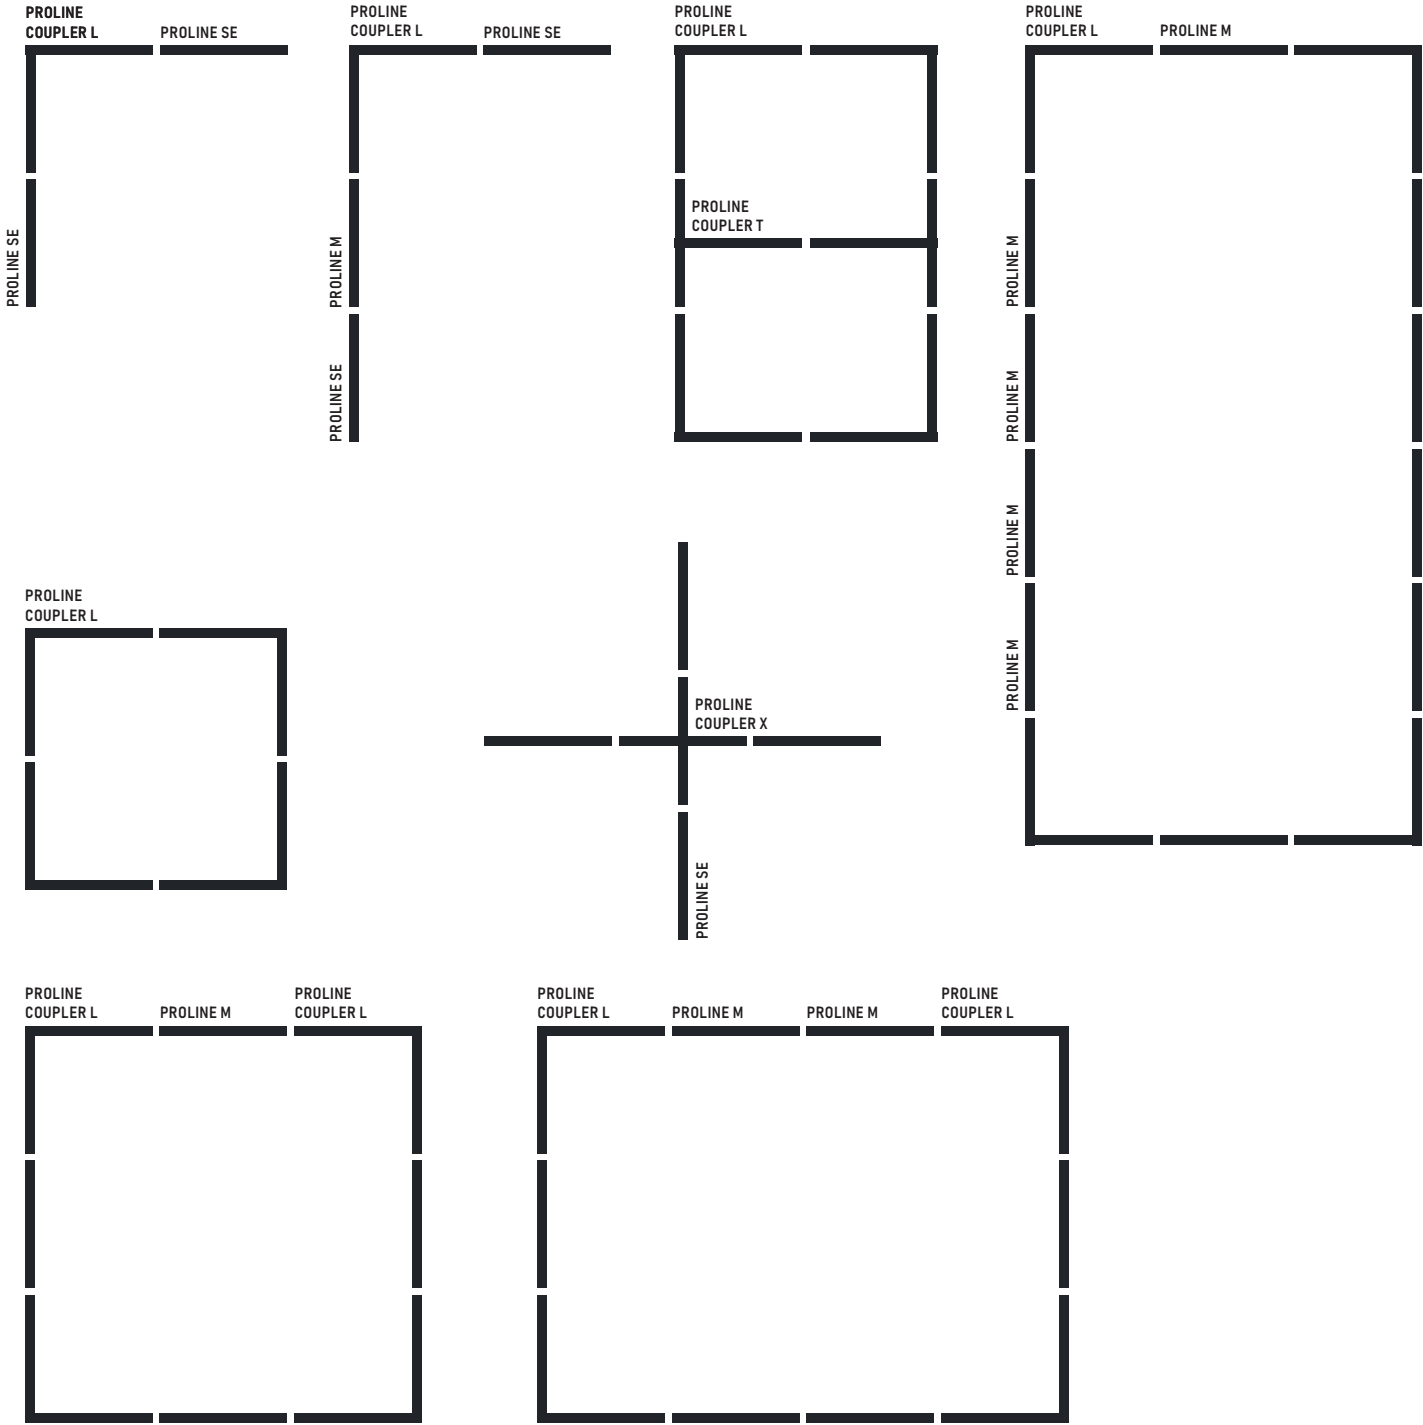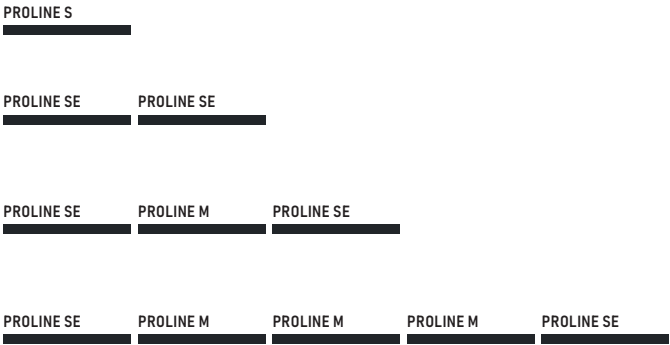

PROLINE CONCEPT - HOW TO BUILD LIGHTING SYSTEMS:

- Always start your linear lighting system with SE type of PROFILE
- Use required number of M type PROFILES to extend length of your lighting system
- Always finish your linear lighting system with SE type of PROFILE
- COUPLERS T, X and L type can be used to modify your lighting system design
- Each end of T, X or L COUPLER must be connected further to M or SE type of PROFILE.
- End of COUPLER can't be closed with end cap directly.
- Remember - PROLINE M can't exist on its own without additional SE type of PROFILES.
- Available length of PROLINE elements (SE/M can be found on corresponding pages in our catalogue)
- All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems.

