




PROLINE 60 LVR

Surface mounted or suspended LED luminaire with direct or direct/indirect lighting. All accessories such as suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems. Bespoke lengths of lighting lines available on request.

Mounting:	Directly on the surface, suspended
Body material:	Aluminium profile
Colour:	Standard White RAL 9016, other RAL colours on request (please add RAL colour after index number)
LED module:	Signify (Philips), Osram, Tridonic or equivalent LED module included
Colour temperature:	3000/4000K, other on request
Colour Rendering Index (CRI):	>80 in standard, other on request
Diffuser:	Parabolic louver
Driver:	EVG/DALI on request
Emergency unit:	On request
Movement sensor:	On request
Daylight control sensor:	On request
Operating temperature range:	0°C ... +40°C
IP Class:	IP20 in standard, IP44 on request
Power:	220-240V 50/60Hz
Lighting direction:	Direct or direct/indirect lighting
Light distribution:	Symmetric
General data:	5 Years standard warranty

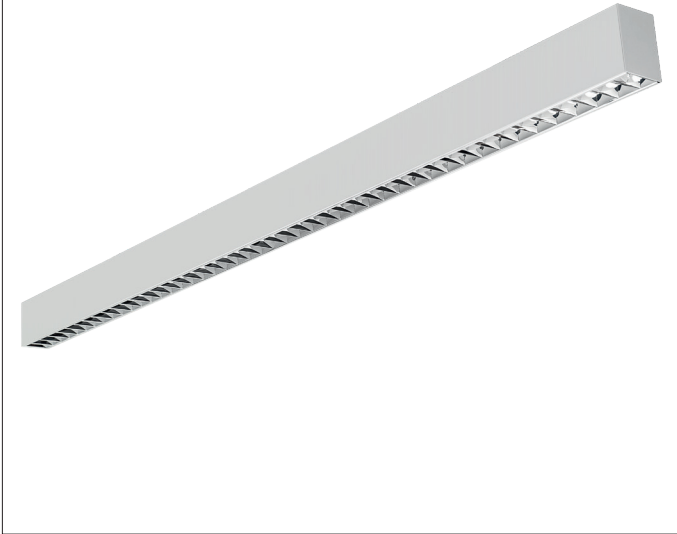

Drawing

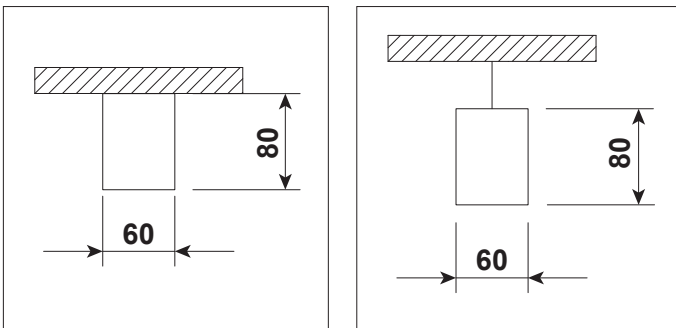

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used


Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



Available versions

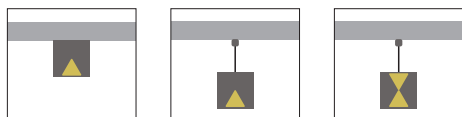

PROLINE 60 LVR

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE Type S DN (single bar) light down, ceiling mounted or suspended (suspension set to be ordered separately, end caps included)										
10.00310.83.E.ML	PROLINE 60 LVR S DN 4400 lm/830/E/ML	4400	3300	26	127	3000	1150	60	80	3,5
10.00310.84.E.ML	PROLINE 60 LVR S DN 4400 lm/840/E/ML	4400	3300	26	127	4000	1150	60	80	3,5
10.00311.83.E.ML	PROLINE 60 LVR S DN 5500 lm/830/E/ML	5500	4125	33	125	3000	1430	60	80	4,2
10.00311.84.E.ML	PROLINE 60 LVR S DN 5500 lm/840/E/ML	5500	4125	33	125	4000	1430	60	80	4,2
10.00312.83.E.ML	PROLINE 60 LVR S DN 8800 lm/830/E/ML	8800	6600	52	127	3000	2274	60	80	6,8
10.00312.84.E.ML	PROLINE 60 LVR S DN 8800 lm/840/E/ML	8800	6600	52	127	4000	2274	60	80	6,8
10.00313.83.E.ML	PROLINE 60 LVR S DN 11000 lm/830/E/ML	11000	8250	64	129	3000	2830	60	80	8,5
10.00313.84.E.ML	PROLINE 60 LVR S DN 11000 lm/840/E/ML	11000	8250	64	129	4000	2830	60	80	8,5
PROFILE Type S UP/DN (single bar) light up/down - suspended version only (suspension set to be ordered separately, end caps included)										
10.00315.83.E.ML	PROLINE 60 LVR S UP/DN 7700 lm/830/E/ML	7700	5390	46	117	3000	1150	60	80	3,5
10.00315.84.E.ML	PROLINE 60 LVR S UP/DN 7700 lm/840/E/ML	7700	5390	46	117	4000	1150	60	80	3,5
10.00316.83.E.ML	PROLINE 60 LVR S UP/DN 9900 lm/830/E/ML	9900	6930	58	119	3000	1430	60	80	4,2
10.00316.84.E.ML	PROLINE 60 LVR S UP/DN 9900 lm/840/E/ML	9900	6930	58	119	4000	1430	60	80	4,2
10.00317.83.E.ML	PROLINE 60 LVR S UP/DN 16500 lm/830/E/ML	16500	11550	91	118	3000	2274	60	80	6,8
10.00317.84.E.ML	PROLINE 60 LVR S UP/DN 16500 lm/840/E/ML	16500	11550	91	118	4000	2274	60	80	6,8
10.00318.83.E.ML	PROLINE 60 LVR S UP/DN 20900 lm/830/E/ML	20900	14630	104	118	3000	2830	60	80	8,5
10.00318.84.E.ML	PROLINE 60 LVR S UP/DN 20900 lm/840/E/ML	20900	14630	104	118	4000	2830	60	80	8,5

PROLINE 60 LVR EXTRAS

Product code	Product name
Accessories	
90.00106.15	Suspension set for PROLINE 45/60 - 1,5 m long steel wire (1 piece)
90.00101.15	Transparent 1,5m long 3 core power cable, ceiling cup included
90.00102.15	Transparent 1,5m long 5 core power cable, ceiling cup included

Accessories



Suspension set for PROLINE 60 - steel wire 1,5 m



3 core transparent power feed, 1,5 m including ceiling base



5 core transparent power feed, 1,5 m including ceiling base



Direct/indirect version - UP/DN