

SNAKE SYSTEM 1



Pendant direct or direct / indirect LED luminaire.

- Mounting:** Suspended on 1,5m long steel wire suspension (with wire length control)
- Body material:** Steel and aluminium
- Colour:** Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
- LED module:** Signify (Philips), Osram, Tridonic or equivalent LED module included
- Colour temperature:** 3000 / 4000K, other on request
- Colour Rendering Index (CRI):** >80 in standard, other on request
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** Standard or DALI, 3 hour emergency unit on request
- Movement sensor:** On request
- Daylight control sensor:** On request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting in standard, direct / indirect lighting on request
- Light distribution:** Symmetric
- Diffuser:** [WD] white opalic in standard, Microprismatic [MPR] on request
- General data:** 5 Years standard warranty

Different lumen output or wattage available on request

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.


System power consumption (LED module & driver) depends on components used

Efficacy depends on type of LED's, electronics, optics and diffuser and may differ from shown in our data pages. Most up to date information can be found in our lighting data file database.



BESPOKE SIZE & PRODUCT FEATURES AVAILABLE

Available luminaire versions

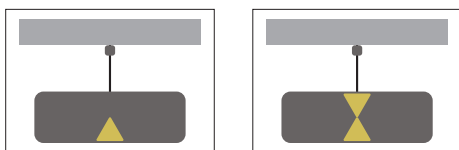

Index no.	Net lumen output [lm]	Gross lumen output [lm]	Efficacy [lm/W]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	MacAdam [SDCM]	Weight [kg]
7389.40000/830	27000	40000	109	247	3000	Ra > 80	50.000	3	35,00
7389.40000/840	27000	40000	109	247	4000	Ra > 80	50.000	3	35,00

[WD] diffuser



[MPR] diffuser

