


## STRING SYSTEM 2

Suspended linear lighting system available in 1200 mm or 1500 mm long sections, which can be connected together into long lighting lines

- Mounting:** Suspended, standard 1,5 m steel wire suspensions included
- Body material:** Steel and aluminium
- Colour:** Standard White RAL 9016, other RAL colours on request ( please add RAL code after index number )
- LED module:** Philips / Osram / Tridonic or equivalent LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI)** >80 in standard , other on request
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** on request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C... +40°C
- IP Class:** IP44
- Power:** 220-240V 50/60Hz
- Lighting direction :** Direct
- Reflector type :** Integrated lens
- Light distribution :** Symmetric - wide, medium, narrow or ASymmetric available
- Diffusor :** N/A
- General data:** 5 Years standard warranty

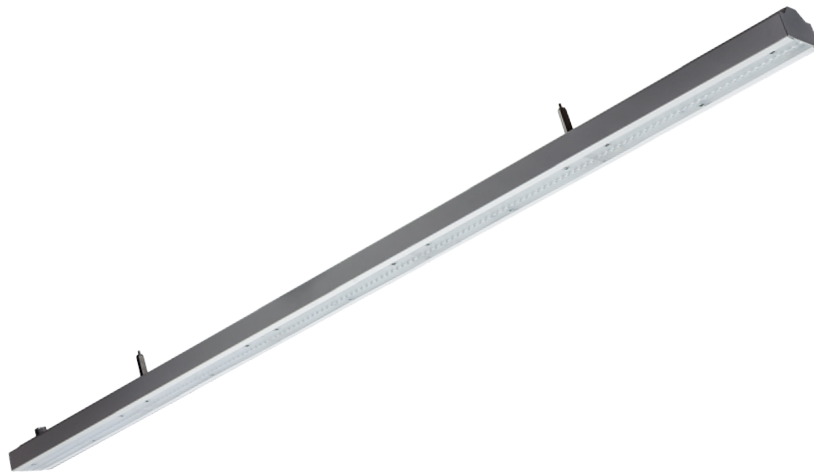

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
6105.4800/830	4800	30	3000	Ra > 80	50.000	5	3	1125	3,50
6105.4800/840	4800	30	4000	Ra > 80	50.000	5	3	1125	3,50
6105.6000/830	6000	37	3000	Ra > 80	50.000	5	3	1406	4,50
6105.6000/840	6000	37	4000	Ra > 80	50.000	5	3	1406	4,50

Different lumen output or wattage available on request

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

