



## UV HYBRID



<b>Coverage area:</b>	up to 25 m <sup>2</sup>
<b>Power:</b>	220-240V 50/60Hz
<b>Mass:</b>	ca. 9 kg
<b>Fan performance:</b>	125 m <sup>3</sup> /h
<b>Recommended uptime:</b>	indirect 24h / >15 min direct
<b>Radiators replacement:</b>	once a year
<b>Protective foil for external radiator</b>	on request
<b>Mounting:</b>	wall, ceiling or tripod
<b>Radiator:</b>	3x 30W Philips radiator (253,7nm)
<b>Air filter replacement:</b>	depending on the usage (twice a year recommended)
<b>Disinfection time:</b>	>15 min
<b>Applications:</b>	air and surface disinfection and prevention of secondary infections. Eliminates bacteria, viruses, fungi, mold
<b>General data:</b>	Use in production halls, health care facilities, pharmacies, public transport, shops and many more
<b>Accessories:</b>	wireless control, movement sensor

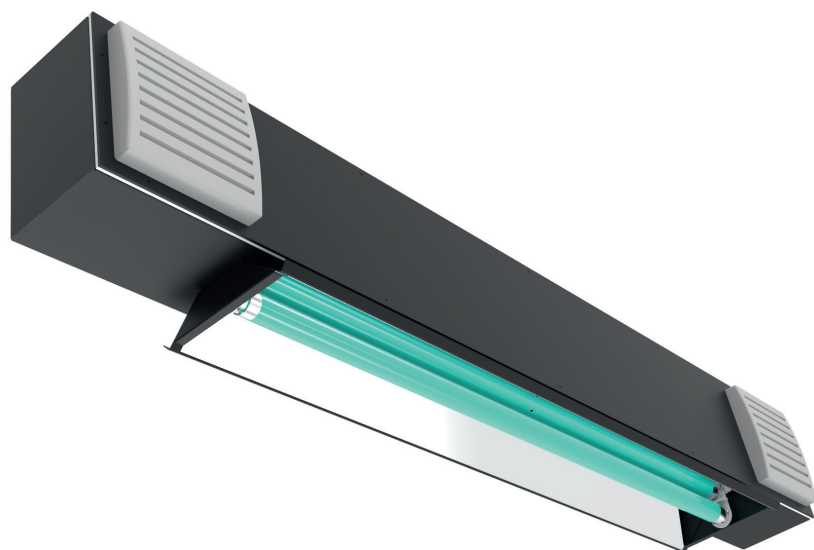

AIR



SURFACE



Index no.	Coverage area (m <sup>2</sup> )	Light Source	UVC Power (W)	Total power consumption (W)	Weight (kg)
7808.330/TUV	25 Indirect + 15 Direct	3x 30W	39,3	70	11
7808.336/TUV	25 Indirect + 17 Direct	3x 36W	46,5	138	13

Accessories	Index no.
Movement sensor	7848
Remote control	7847
Tripod	7829
Mounting arm	7846
Protective foil for radiator:	7854

