



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



CLEANEO 600 SURF 4PL

Surface mounted IP65 LED luminaire with UGR<19.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	N/A
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.




CLEANEO 1200 SURF 3PL

Surface mounted IP65 LED luminaire with UGR<19.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.

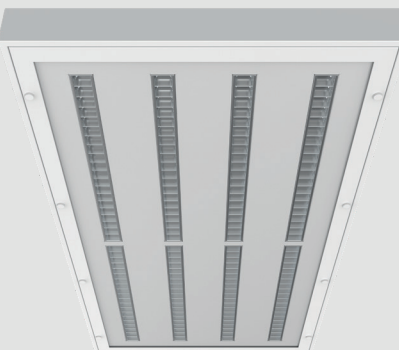

CLEANEO 1200 SURF 4PL

Surface mounted IP65 LED luminaire with UGR<19.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass



CONNECTED LIGHTING


MasterConnect

MasterConnect is simple, cost-effective wireless system enabling energy savings and comfort lighting experience.

MasterConnect components are available in all our products on request

System features:

- App-based setup
- App-based configuration
- App-based end user control
- Manual control - Wireless dimming & Scene control
- Room based sensing: Occupancy detection, daylight harvesting

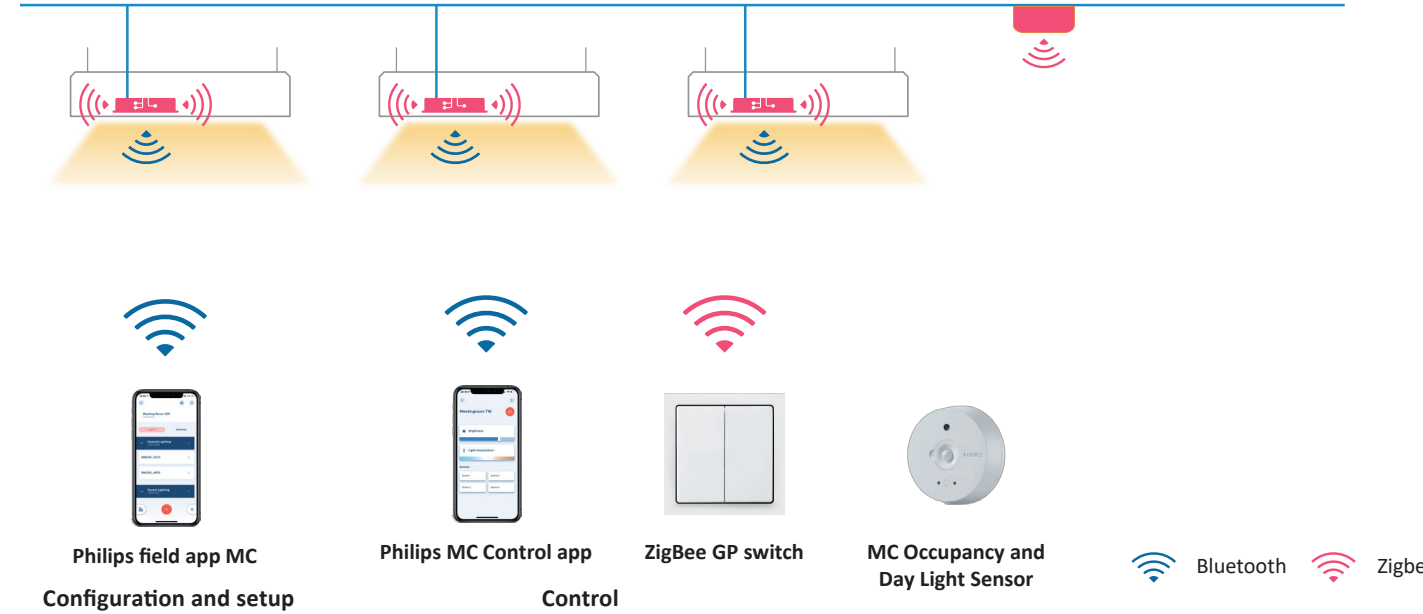


IMPERIAL SP. Z O.O.
78-200 BIALOGARD, POLAND
VAT PL 672-209-74-37
WWW.IMPERIAL.PL
OFFICE@IMPERIAL.PL






CLEAN ROOM LIGHTING

New premium class lighting



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



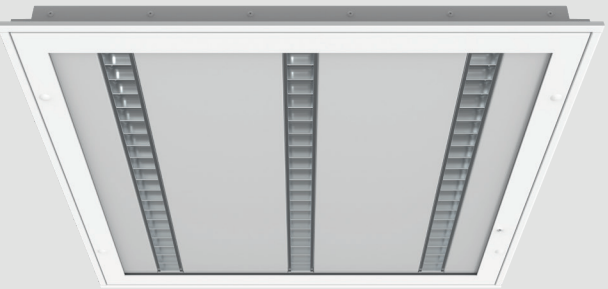


CLEANEO 600 3PL



Recessed IP65 LED luminaire with UGR<19 for mounting in modular ceiling, version for gypsum ceiling on request.


Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



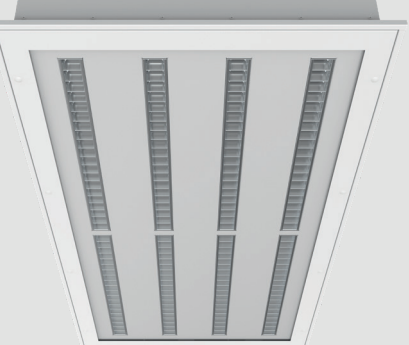

CLEANEO 1200 4PL

Recessed IP65 LED luminaire with UGR<19 for mounting in modular ceiling, version for gypsum ceiling on request.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.






CLIN 600 SURF OP



Surface mounted IP65 LED luminaire.


Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	N/A
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	White aluminium
Light distribution:	Symmetric
Diffusor:	Clear glass with opalic film





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.






CLEANEO 600 4PL



Recessed IP65 LED luminaire with UGR<19 for mounting in modular ceiling, version for gypsum ceiling on request.


Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



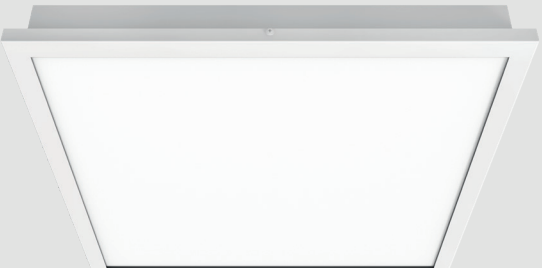

CLIN 600 OP

Recessed IP65 LED luminaire for mounting in modular ceiling, version for gypsum ceiling on request.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	White aluminium
Light distribution:	Symmetric
Diffusor:	Clear glass with opalic film





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.






CLIN 1200 SURF OP



Surface mounted IP65 LED luminaire.


Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	White aluminium
Light distribution:	Symmetric
Diffusor:	Clear glass with opalic film





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.





CLEANEO 1200 3PL

Recessed IP65 LED luminaire with UGR<19 for mounting in modular ceiling, version for gypsum ceiling on request.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.





CLIN 1200 OP

Recessed IP65 LED luminaire for mounting in modular ceiling, version for gypsum ceiling on request.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	on request
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	White aluminium
Light distribution:	Symmetric
Diffusor:	Clear glass with opalic film





Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.





CLEANEO 600 SURF 3PL

Surface mounted IP65 LED luminaire with UGR<19.

Body material:	Steel and aluminium
Colour:	Standard White RAL 9016, other RAL colours on request
LED module:	Signify (Philips) or equivalent LED module included
Colour temperature:	3000K/4000K/Tunable White
Colour Rendering Index (CRI):	>80 in standard, >90 on request
Driver:	EVG/DALI/MasterConnect on request
Emergency unit:	N/A
Movement sensor:	on request
Daylight control sensor:	on request
Lighting direction:	Direct lighting
Reflector type:	Parabolic louver
Light distribution:	Symmetric
Diffusor:	Clear glass

