



PROLINE 50

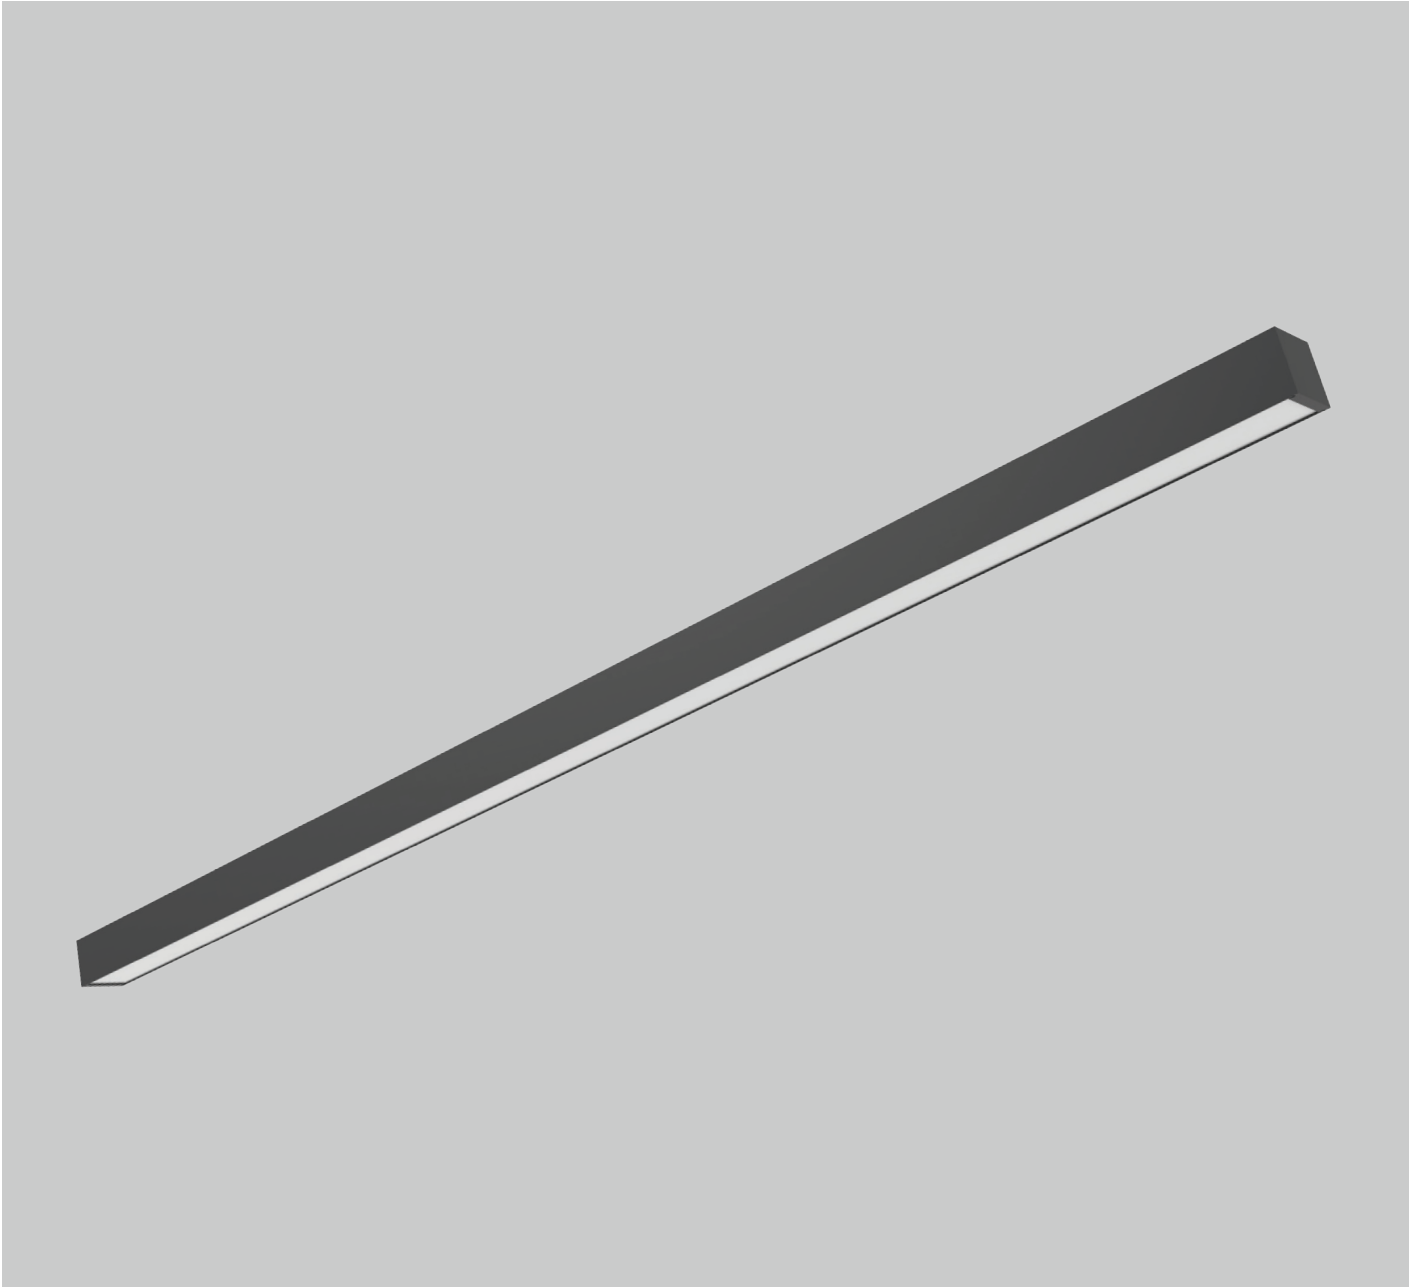

Linear luminaire made of extruded aluminum profile. High luminous efficacy optics with selection of diffusers. Direct lighting type. Top quality SMD LED modules with colour consistency MacAdams ≤ 3 , extensive portfolio of lumen ranges, CCTs and spectra. Variety of drivers: standard EVG on/off, DALI and wireless controlled as MasterConnect or Casambi on request. Built-in or remote, wireless occupancy & daylight sensor available to allow significant energy savings and wireless connectivity. Mounting type: surface mounted, wall mounted, suspended, trimless recessed (custom made ceiling brackets on request). Standard colour RAL 9003S, any other colour from basic RAL range available at no extra cost. Variety of diffusers, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Wide selection of standard lengths: single linear luminaires (type S) or system luminaires (type SE/M) and system connectors (L,T,X type). Many lengths of lighting lines, square and rectangular shapes can be created by using our system pieces. End caps for single (S type) profiles included. All accessories such as end caps, linear connectors, quick connectors, suspension wires or power cables for system profiles (SE/M type) or TR mounting brackets (for TR version) should be ordered separately. Bespoke lengths and shapes of lighting lines available on request.

Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffuser. The most up to date technical parameters can be found on our website and in database of LDT files.

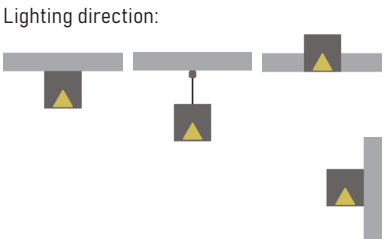

PDF datasheet:



PROLINE 50

Mounting:	Surface mounted, suspended, wall mounted, trimless recessed
Body material:	Aluminium profile
Colour:	Standard white RAL 9003M, other RAL colours on request
Lumen output:	Standard up to 4000 lm/meter, any other on request
LED module:	Signify (Philips), Tridonic or equivalent SMD LED modules
Colour temperature:	3000/4000K/2700-6500K TW other on request
Colour Rendering:	CRI>80 in standard, other on request
Driver:	EVG on-off/DALI/TW DT8/MC (MasterConnect)/Casambi, other on request
Wireless control:	Philips MasterConnect / Casambi, other on request
Daylight/Occupancy sensor:	Built-in IC sensor or wireless ICS sensor
Emergency unit:	On request
Operating temperature range:	0°C ... +35°C
IP Class:	IP20 in standard
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Light distribution:	Symmetric
Diffusor:	OP white acrylic / MP19H microprismatic UGR<19
Optics:	White reflector
Beam angle:	All types available in our LDT file database
Warranty:	5 Years standard warranty

- PROLINE 50 S DN** single profile, ceiling mounted or suspended, light down, OP or MP19H diffusor
PROLINE 50 SE DN system profile START/END type, ceiling mounted or suspended, light down, OP or MP19H diffusor
PROLINE 50 M DN system profile MIDDLE type, ceiling mounted or suspended, light down, OP or MP19H diffusor
PROLINE 50 L / T / X DN system profile L/T/X type, ceiling mounted or suspended, light down, OP or MP19H diffusor
PROLINE 50 S DN WL single profile, wall mounted, light down, OP or MP19H diffusor
PROLINE 50 TR S DN single profile, trimless recessed, light down, OP or MP19H diffusor



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



Zigbee



Bluetooth

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist. Details on wireless lighting control systems on page number 896.




ICSW wireless switch



ICS wireless daylight&occ sensor



IC daylight&occ sensor



Basic dimensions

PROLINE 50



OP white acrylic diffuser



MP19H microprismatic diffuser




Trimless mounting available for all types



TR REC BOX 40 trimless mounting system


All PROLINE type luminaires can be made to measure as single lighting lines or lighting systems in different sizes and shapes. Please contact our sales team for details.

Mounting types:

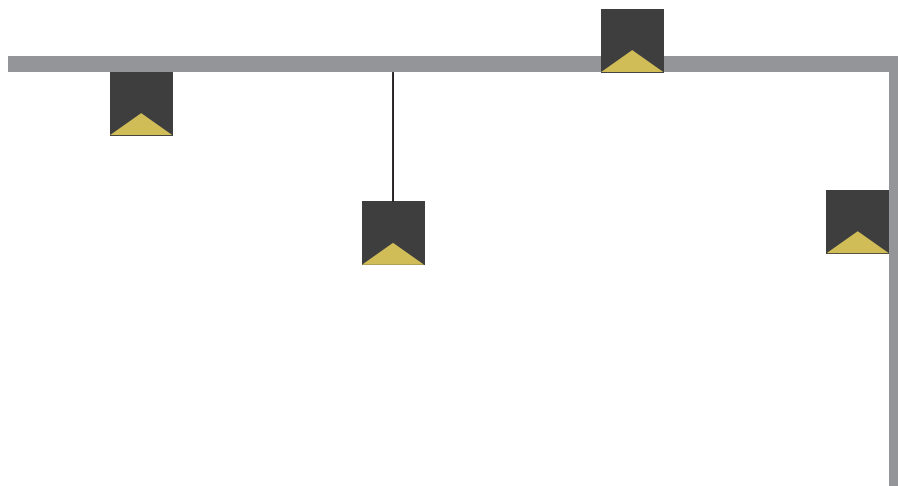

PROLINE 50

Accessories:



Suspension for PROLINE 50 - 1,5 m long steel wire (1 piece)




3 or 5 core transparent power feed, 1,5 m including ceiling base



End cap for PROLINE 50 (1 piece)



TR REC BOX 50 - steel box for plasterboard ceiling trimless mounting



Linear connector for PROLINE 50



3 pole quick connectors (Male + Female)



5 pole quick connectors (Male + Female)




TR (trimless) mounting bracket



All accessories for system profiles and couplers (Type SE / M / L / T / X) such as end caps, linear connectors, quick connectors, suspension wires or power cables should be ordered separately.

Accessories for single profiles (Type S) such as suspension wires or power cables should be ordered separately. End caps for single profiles are included in product's index numbers.



Couplers:




PROLINE 50 system coupler type L DN




PROLINE 50 system coupler type T DN



PROLINE 50 system coupler type X DN



PROLINE 50

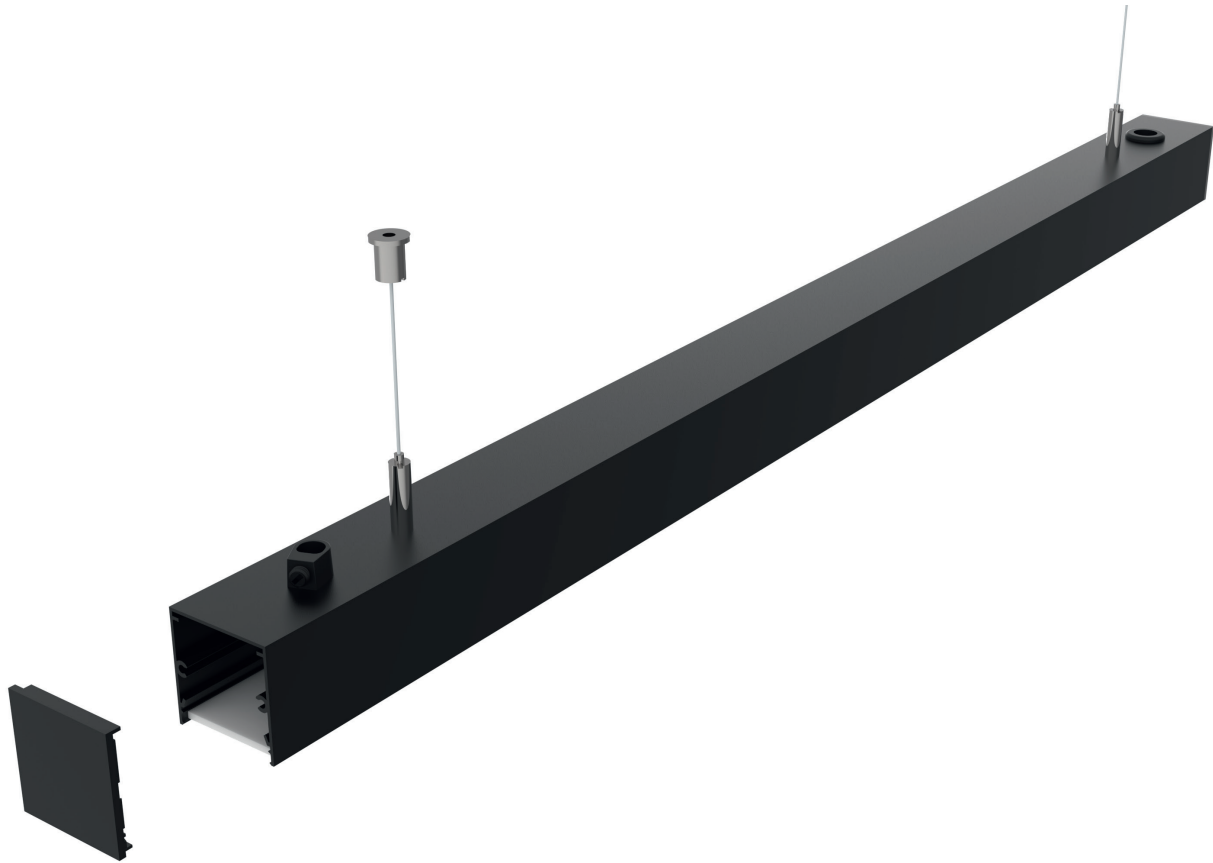

Technical information:

- OP** – White acrylic diffuser with over 85% of light transmission to provide high class lighting efficacy.
- MP19H** – UGR<19 diffuser solution with extra layer of white acrylic film that provide comfortable lighting from any angle.
- XC** – Built-in daylight&occupancy sensor available with all types of profile luminaires.
- MCS** – Wireless daylight&occupancy sensor available with all types of profile luminaires.
- XCS** – Wireless power switch with dimming and scene setup option.
- TR** – Trimless mounting bracket for plasterboard ceiling type – can be custom made depending on ceiling type used.
- TR REC BOX** – Trimless mounting box for plasterboard ceiling type – can be custom made depending on ceiling type used.



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.



Zigbee



Bluetooth

PROLINE 50

Profile types:

Single profile versions:

TYPE S DN single profile, light down



MOUNTING OPTIONS:

light down, surface mounted
light down, suspended
light down, wall mounted
light down, trimless recessed

System profile versions:

TYPE SE DN system profile, start/end section, light down



MOUNTING OPTIONS:

light down, surface mounted
light down, suspended
light down, trimless recessed

TYPE M DN system profile, middle section, light down




MOUNTING OPTIONS:


light down, surface mounted
light down, suspended
light down, trimless recessed

PROLINE 50


Single profile, standard lengths including end caps TYPE S DN:

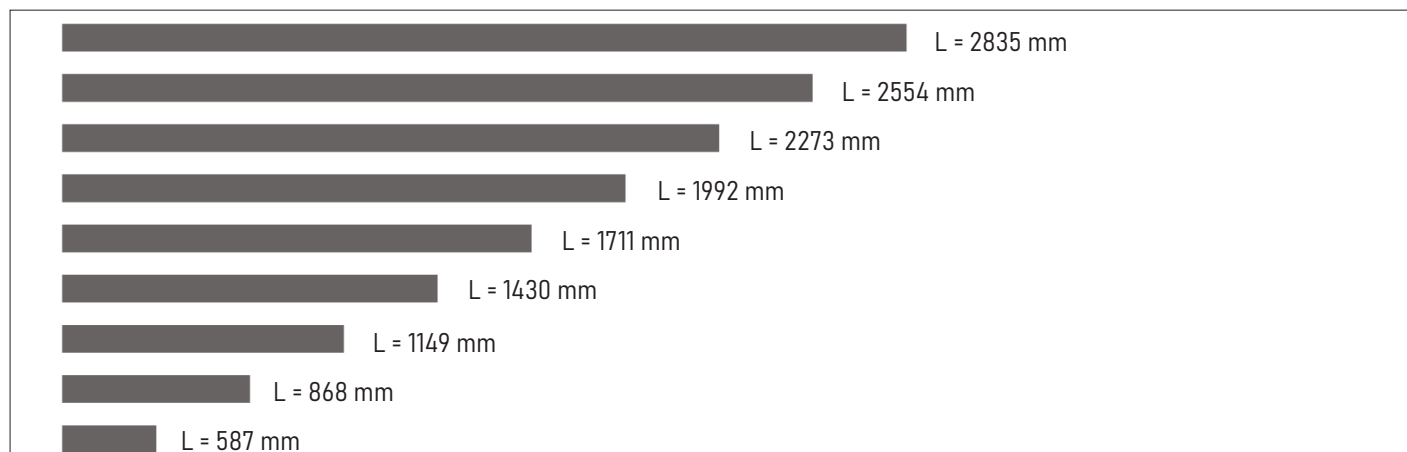

System profile, start/end section lengths including one end cap TYPE SE DN:

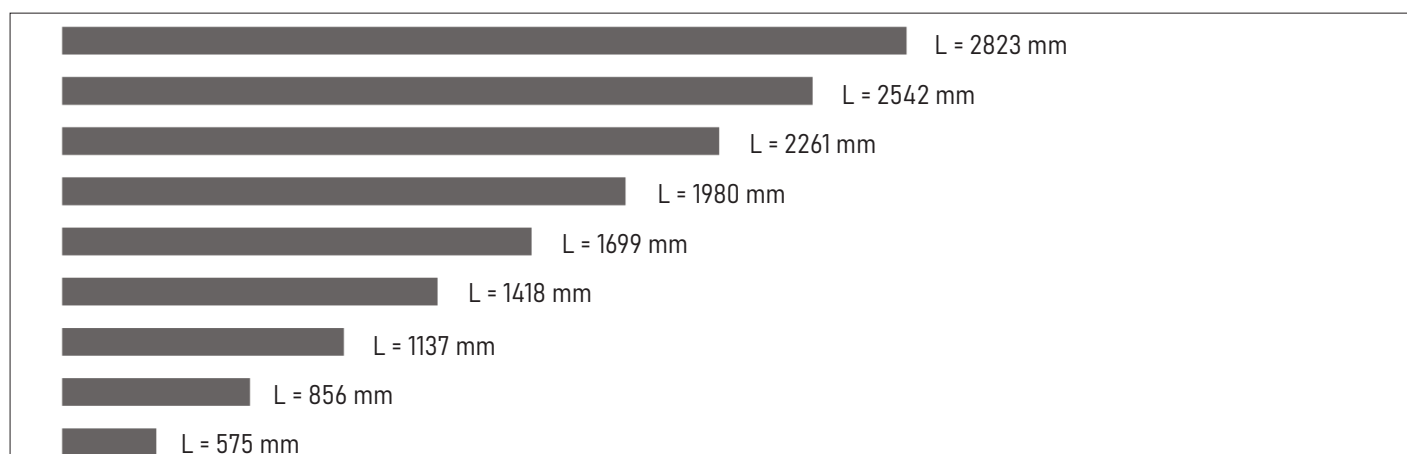



System profile, middle section lengths TYPE M DN:

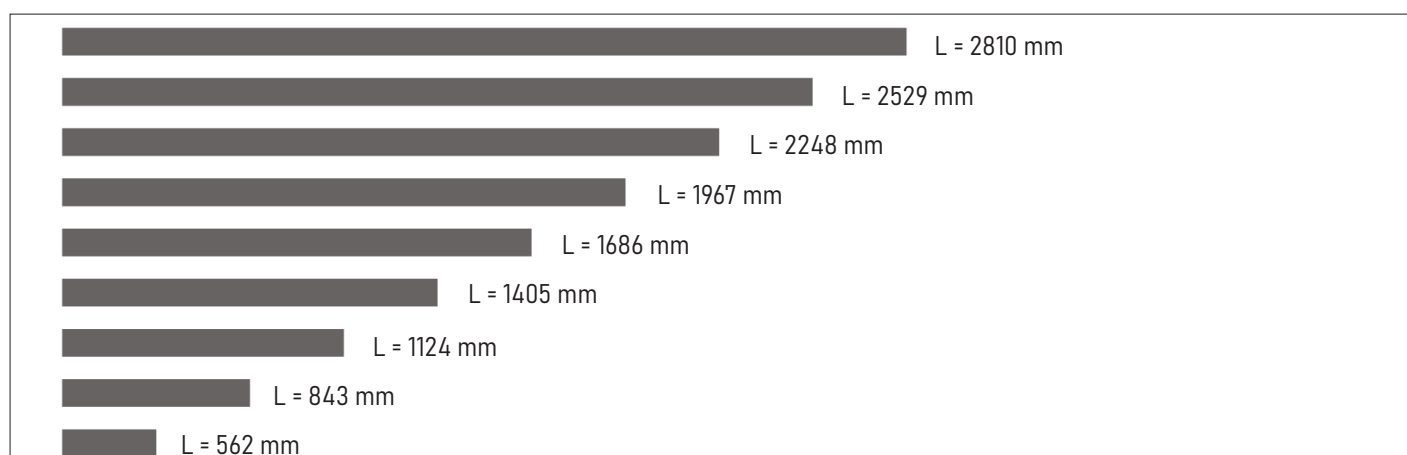

PROLINE 50

DESCRIPTION OF PROLINE CONCEPT:


- PROLINE S DN - single luminaires with light down (can't be connected into lighting systems)
- PROLINE SE DN - system luminaire with light down (must be used at the beginning and at the end of each linear lighting system)
- PROLINE M DN - system luminaire with light down (middle section to be used in between SE type profiles). Any length of lighting system can be created by using different lengths and numbers of M-type profiles between two SE-type profiles.

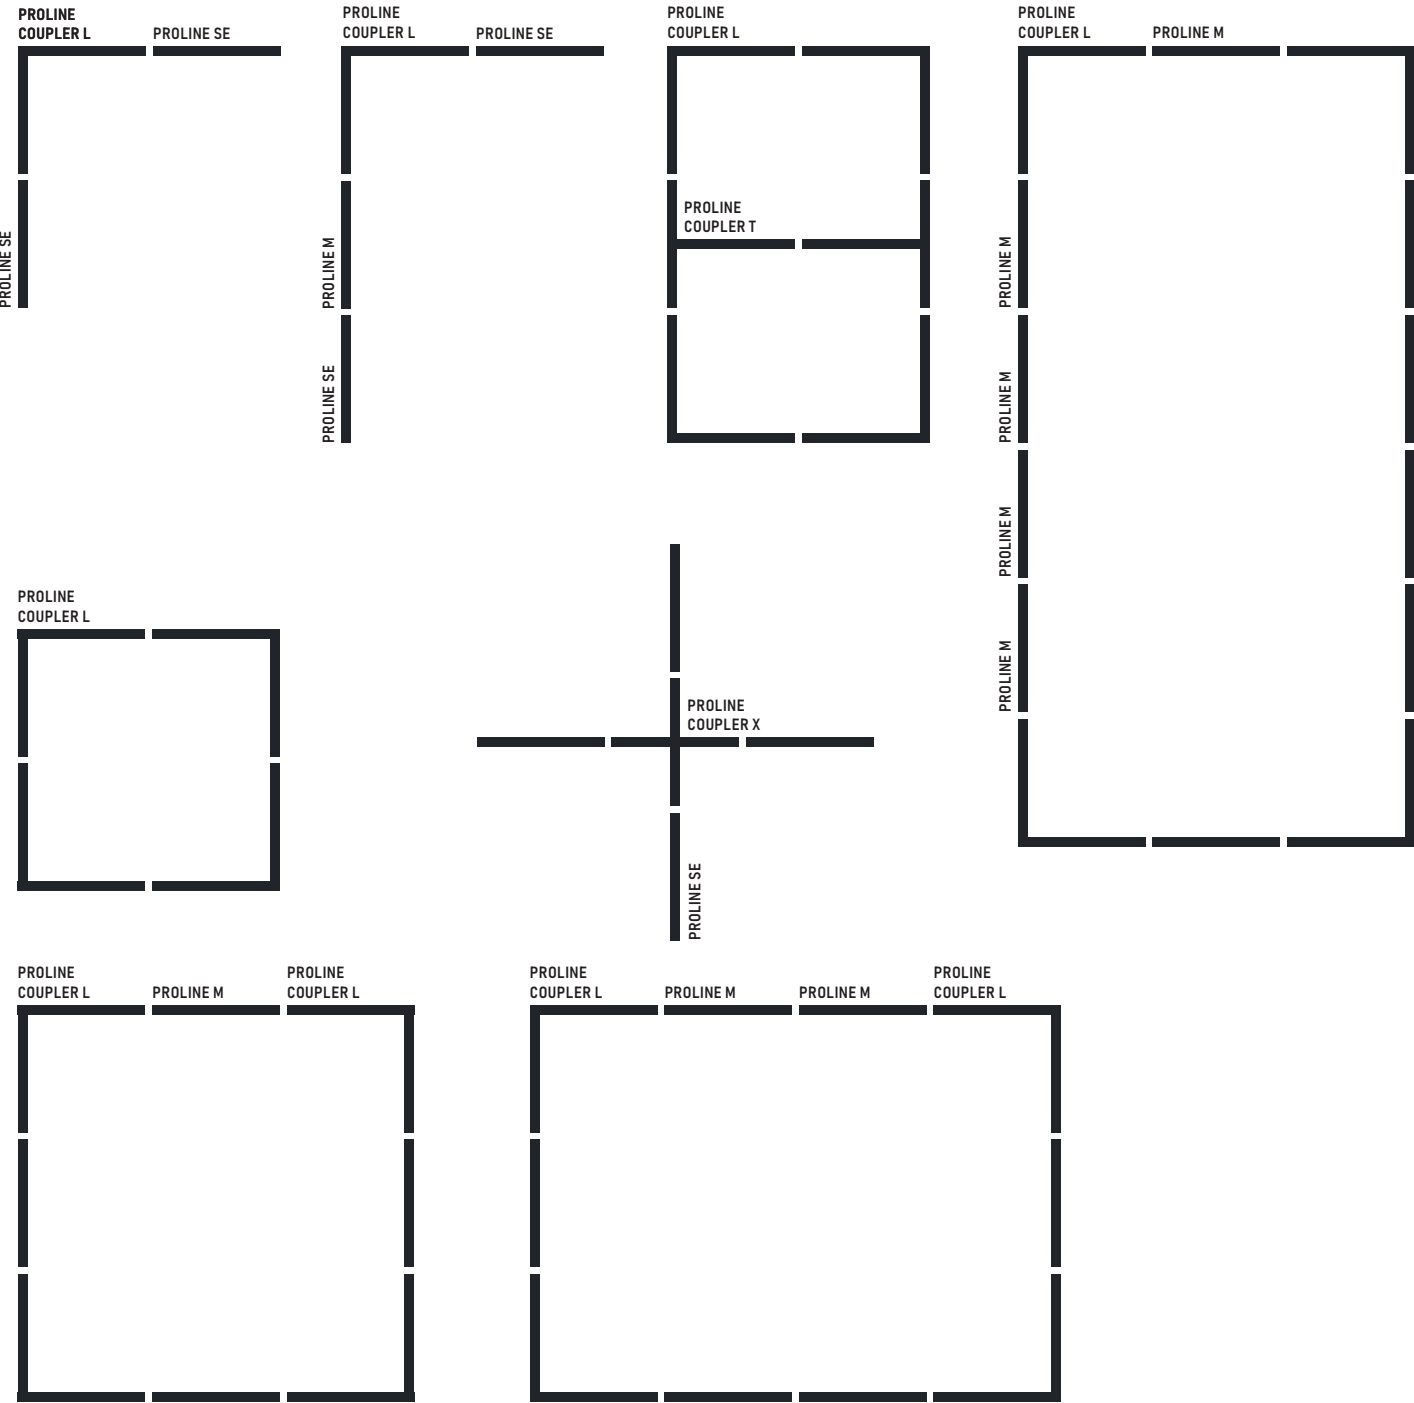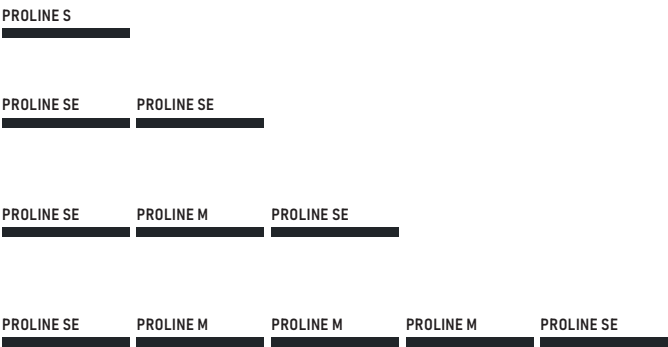


PROLINE 50

PROLINE CONCEPT - HOW TO BUILD LIGHTING SYSTEMS:


- Always start your linear lighting system with SE type of PROFILE
- Use required number of M type PROFILES to extend length of your lighting system
- Always finish your linear lighting system with SE type of PROFILE
- COUPLERS T, X and L type can be used to modify your lighting system design
- Each end of T, X or L COUPLER must be connected further to M or SE type of PROFILE.
- End of COUPLER can't be closed with end cap directly.
- Remember - PROLINE M can't exist on its own without additional SE type of PROFILES.
- Available length of PROLINE elements (SE/M can be found on corresponding pages in our catalogue)
- All accessories such as end caps, linear connectors, quick connectors, suspension wires or power cables should be ordered separately for all types of system profiles: Type SE / M / L / X / T.
- Accessories such as suspension wires or power cables should be ordered separately for all types of single profiles: Type S (end caps are included).

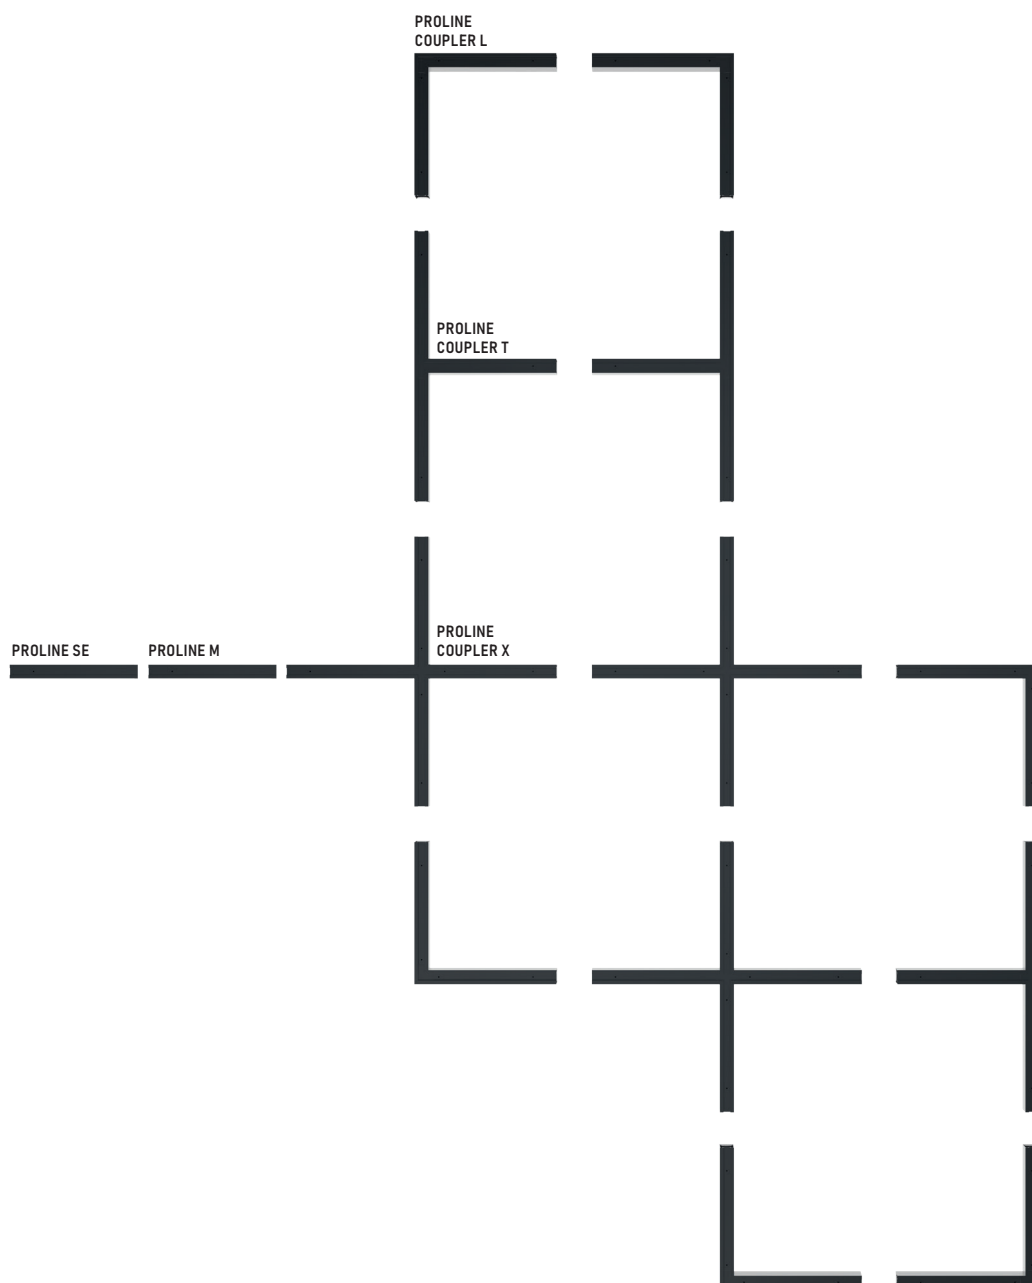

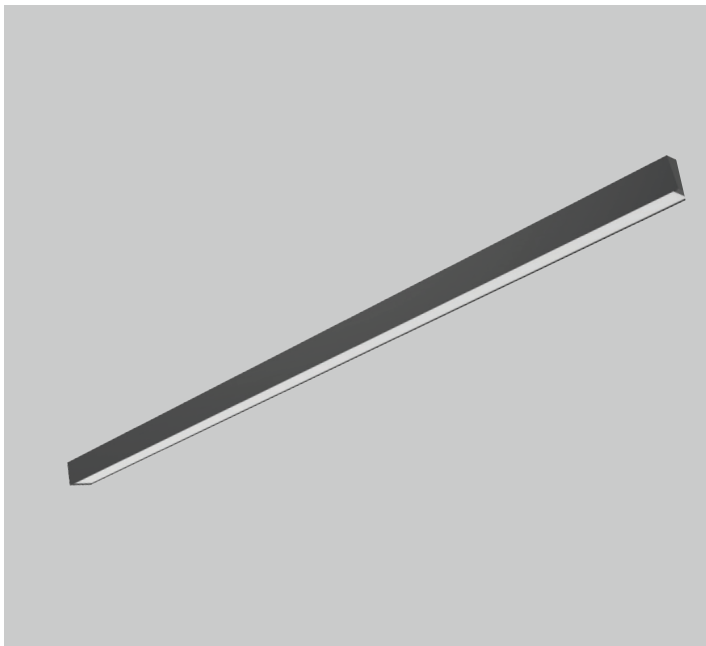


PROLINE 50 SINGLE PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour tempera- ture [K]	Optics	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE type S DN (single bar) light down, ceiling mounted or suspended, end caps included (suspension sets to be ordered separately)											
10.00499.83.E.OP	PROLINE 50 S DN 2200 lm / 830 / E / OP	2200	1870	14	134	3000	Symmetrical	587	50	50	1,3
10.00499.84.E.OP	PROLINE 50 S DN 2200 lm / 840 / E / OP	2200	1870	14	134	4000	Symmetrical	587	50	50	1,3
10.00500.83.E.OP	PROLINE 50 S DN 3300 lm / 830 / E / OP	3300	2800	20	140	3000	Symmetrical	868	50	50	1,6
10.00500.84.E.OP	PROLINE 50 S DN 3300 lm / 840 / E / OP	3300	2800	20	140	4000	Symmetrical	868	50	50	1,6
10.00501.83.E.OP	PROLINE 50 S DN 4400 lm / 830 / E / OP	4400	3750	26	144	3000	Symmetrical	1149	50	50	1,9
10.00501.84.E.OP	PROLINE 50 S DN 4400 lm / 840 / E / OP	4400	3750	26	144	4000	Symmetrical	1149	50	50	1,9
10.00502.83.E.OP	PROLINE 50 S DN 5500 lm / 830 / E / OP	5500	4675	33	142	3000	Symmetrical	1430	50	50	2,6
10.00502.84.E.OP	PROLINE 50 S DN 5500 lm / 840 / E / OP	5500	4675	33	142	4000	Symmetrical	1430	50	50	2,6
10.00503.83.E.OP	PROLINE 50 S DN 6600 lm / 830 / E / OP	6600	5610	39	144	3000	Symmetrical	1711	50	50	3,1
10.00503.84.E.OP	PROLINE 50 S DN 6600 lm / 840 / E / OP	6600	5610	39	144	4000	Symmetrical	1711	50	50	3,1
10.00504.83.E.OP	PROLINE 50 S DN 7700 lm / 830 / E / OP	7700	6545	46	142	3000	Symmetrical	1992	50	50	3,6
10.00504.84.E.OP	PROLINE 50 S DN 7700 lm / 840 / E / OP	7700	6545	46	142	4000	Symmetrical	1992	50	50	3,6
10.00505.83.E.OP	PROLINE 50 S DN 8800 lm / 830 / E / OP	8800	7480	52	144	3000	Symmetrical	2273	50	50	4,1
10.00505.84.E.OP	PROLINE 50 S DN 8800 lm / 840 / E / OP	8800	7480	52	144	4000	Symmetrical	2273	50	50	4,1
10.00506.83.E.OP	PROLINE 50 S DN 9900 lm / 830 / E / OP	9900	8415	58	145	3000	Symmetrical	2554	50	50	4,6
10.00506.84.E.OP	PROLINE 50 S DN 9900 lm / 840 / E / OP	9900	8415	58	145	4000	Symmetrical	2554	50	50	4,6
10.00507.83.E.OP	PROLINE 50 S DN 11000 lm / 830 / E / OP	11000	9350	64	146	3000	Symmetrical	2835	50	50	5,1
10.00507.84.E.OP	PROLINE 50 S DN 11000 lm / 840 / E / OP	11000	9350	64	146	4000	Symmetrical	2835	50	50	5,1
10.00499.83.E.MPH	PROLINE 50 S DN 2200 lm / 830 / E / MPH	2200	1870	14	134	3000	Symmetrical	587	50	50	1,3
10.00499.84.E.MPH	PROLINE 50 S DN 2200 lm / 840 / E / MPH	2200	1870	14	134	4000	Symmetrical	587	50	50	1,3
10.00500.83.E.MPH	PROLINE 50 S DN 3300 lm / 830 / E / MPH	3300	2800	20	140	3000	Symmetrical	868	50	50	1,6
10.00500.84.E.MPH	PROLINE 50 S DN 3300 lm / 840 / E / MPH	3300	2800	20	140	4000	Symmetrical	868	50	50	1,6
10.00501.83.E.MPH	PROLINE 50 S DN 4400 lm / 830 / E / MPH	4400	3750	26	144	3000	Symmetrical	1149	50	50	1,9
10.00501.84.E.MPH	PROLINE 50 S DN 4400 lm / 840 / E / MPH	4400	3750	26	144	4000	Symmetrical	1149	50	50	1,9
10.00502.83.E.MPH	PROLINE 50 S DN 5500 lm / 830 / E / MPH	5500	4675	33	142	3000	Symmetrical	1430	50	50	2,6
10.00502.84.E.MPH	PROLINE 50 S DN 5500 lm / 840 / E / MPH	5500	4675	33	142	4000	Symmetrical	1430	50	50	2,6
10.00503.83.E.MPH	PROLINE 50 S DN 6600 lm / 830 / E / MPH	6600	5610	39	144	3000	Symmetrical	1711	50	50	3,1
10.00503.84.E.MPH	PROLINE 50 S DN 6600 lm / 840 / E / MPH	6600	5610	39	144	4000	Symmetrical	1711	50	50	3,1
10.00504.83.E.MPH	PROLINE 50 S DN 7700 lm / 830 / E / MPH	7700	6545	46	142	3000	Symmetrical	1992	50	50	3,6
10.00504.84.E.MPH	PROLINE 50 S DN 7700 lm / 840 / E / MPH	7700	6545	46	142	4000	Symmetrical	1992	50	50	3,6
10.00505.83.E.MPH	PROLINE 50 S DN 8800 lm / 830 / E / MPH	8800	7480	52	144	3000	Symmetrical	2273	50	50	4,1
10.00505.84.E.MPH	PROLINE 50 S DN 8800 lm / 840 / E / MPH	8800	7480	52	144	4000	Symmetrical	2273	50	50	4,1
10.00506.83.E.MPH	PROLINE 50 S DN 9900 lm / 830 / E / MPH	9900	8415	58	145	3000	Symmetrical	2554	50	50	4,6
10.00506.84.E.MPH	PROLINE 50 S DN 9900 lm / 840 / E / MPH	9900	8415	58	145	4000	Symmetrical	2554	50	50	4,6
10.00507.83.E.MPH	PROLINE 50 S DN 11000 lm / 830 / E / MPH	11000	9350	64	146	3000	Symmetrical	2835	50	50	5,1
10.00507.84.E.MPH	PROLINE 50 S DN 11000 lm / 840 / E / MPH	11000	9350	64	146	4000	Symmetrical	2835	50	50	5,1

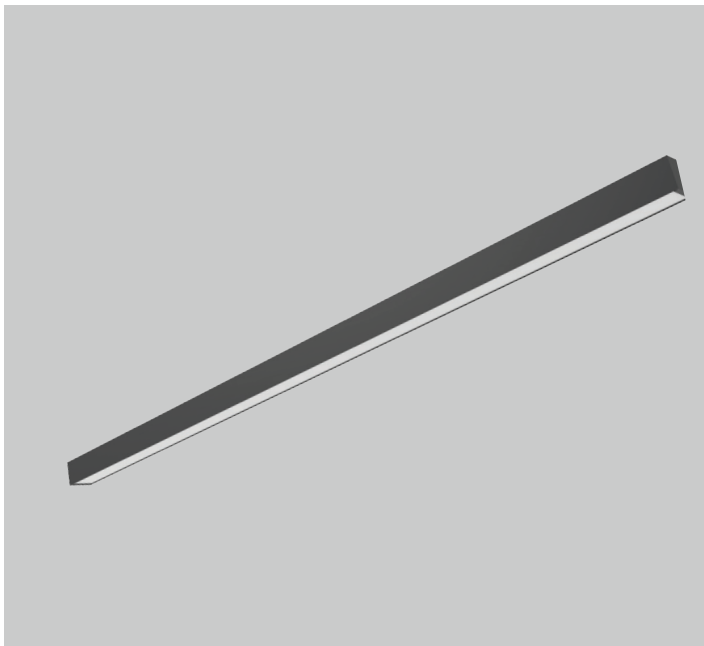


PROLINE 50 SINGLE PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour tempera- ture [K]	Optics	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE type S DN WL (single bar) light down, wall mounted, end caps included											
10.02030.83.E.OP	PROLINE 50 S DN WL 2200 lm / 830 / E / OP	2200	1870	14	134	3000	Symmetrical	587	50	50	1,3
10.02030.84.E.OP	PROLINE 50 S DN WL 2200 lm / 840 / E / OP	2200	1870	14	134	4000	Symmetrical	587	50	50	1,3
10.02031.83.E.OP	PROLINE 50 S DN WL 3300 lm / 830 / E / OP	3300	2800	20	140	3000	Symmetrical	868	50	50	1,6
10.02031.84.E.OP	PROLINE 50 S DN WL 3300 lm / 840 / E / OP	3300	2800	20	140	4000	Symmetrical	868	50	50	1,6
10.02032.83.E.OP	PROLINE 50 S DN WL 4400 lm / 830 / E / OP	4400	3750	26	144	3000	Symmetrical	1149	50	50	1,9
10.02032.84.E.OP	PROLINE 50 S DN WL 4400 lm / 840 / E / OP	4400	3750	26	144	4000	Symmetrical	1149	50	50	1,9
10.02033.83.E.OP	PROLINE 50 S DN WL 5500 lm / 830 / E / OP	5500	4675	33	142	3000	Symmetrical	1430	50	50	2,6
10.02033.84.E.OP	PROLINE 50 S DN WL 5500 lm / 840 / E / OP	5500	4675	33	142	4000	Symmetrical	1430	50	50	2,6
10.02034.83.E.OP	PROLINE 50 S DN WL 6600 lm / 830 / E / OP	6600	5610	39	144	3000	Symmetrical	1711	50	50	3,1
10.02034.84.E.OP	PROLINE 50 S DN WL 6600 lm / 840 / E / OP	6600	5610	39	144	4000	Symmetrical	1711	50	50	3,1
10.02035.83.E.OP	PROLINE 50 S DN WL 7700 lm / 830 / E / OP	7700	6545	46	142	3000	Symmetrical	1992	50	50	3,6
10.02035.84.E.OP	PROLINE 50 S DN WL 7700 lm / 840 / E / OP	7700	6545	46	142	4000	Symmetrical	1992	50	50	3,6
10.02036.83.E.OP	PROLINE 50 S DN WL 8800 lm / 830 / E / OP	8800	7480	52	144	3000	Symmetrical	2273	50	50	4,1
10.02036.84.E.OP	PROLINE 50 S DN WL 8800 lm / 840 / E / OP	8800	7480	52	144	4000	Symmetrical	2273	50	50	4,1
10.02037.83.E.OP	PROLINE 50 S DN WL 9900 lm / 830 / E / OP	9900	8415	58	145	3000	Symmetrical	2554	50	50	4,6
10.02037.84.E.OP	PROLINE 50 S DN WL 9900 lm / 840 / E / OP	9900	8415	58	145	4000	Symmetrical	2554	50	50	4,6
10.02038.83.E.OP	PROLINE 50 S DN WL 11000 lm / 830 / E / OP	11000	9350	64	146	3000	Symmetrical	2835	50	50	5,1
10.02038.84.E.OP	PROLINE 50 S DN WL 11000 lm / 840 / E / OP	11000	9350	64	146	4000	Symmetrical	2835	50	50	5,1
10.02030.83.E.MPH	PROLINE 50 S DN WL 2200 lm / 830 / E / MPH	2200	1870	14	134	3000	Symmetrical	587	50	50	1,3
10.02030.84.E.MPH	PROLINE 50 S DN WL 2200 lm / 840 / E / MPH	2200	1870	14	134	4000	Symmetrical	587	50	50	1,3
10.02031.83.E.MPH	PROLINE 50 S DN WL 3300 lm / 830 / E / MPH	3300	2800	20	140	3000	Symmetrical	868	50	50	1,6
10.02031.84.E.MPH	PROLINE 50 S DN WL 3300 lm / 840 / E / MPH	3300	2800	20	140	4000	Symmetrical	868	50	50	1,6
10.02032.83.E.MPH	PROLINE 50 S DN WL 4400 lm / 830 / E / MPH	4400	3750	26	144	3000	Symmetrical	1149	50	50	1,9
10.02032.84.E.MPH	PROLINE 50 S DN WL 4400 lm / 840 / E / MPH	4400	3750	26	144	4000	Symmetrical	1149	50	50	1,9
10.02033.83.E.MPH	PROLINE 50 S DN WL 5500 lm / 830 / E / MPH	5500	4675	33	142	3000	Symmetrical	1430	50	50	2,6
10.02033.84.E.MPH	PROLINE 50 S DN WL 5500 lm / 840 / E / MPH	5500	4675	33	142	4000	Symmetrical	1430	50	50	2,6
10.02034.83.E.MPH	PROLINE 50 S DN WL 6600 lm / 830 / E / MPH	6600	5610	39	144	3000	Symmetrical	1711	50	50	3,1
10.02034.84.E.MPH	PROLINE 50 S DN WL 6600 lm / 840 / E / MPH	6600	5610	39	144	4000	Symmetrical	1711	50	50	3,1
10.02035.83.E.MPH	PROLINE 50 S DN WL 7700 lm / 830 / E / MPH	7700	6545	46	142	3000	Symmetrical	1992	50	50	3,6
10.02035.84.E.MPH	PROLINE 50 S DN WL 7700 lm / 840 / E / MPH	7700	6545	46	142	4000	Symmetrical	1992	50	50	3,6
10.02036.83.E.MPH	PROLINE 50 S DN WL 8800 lm / 830 / E / MPH	8800	7480	52	144	3000	Symmetrical	2273	50	50	4,1
10.02036.84.E.MPH	PROLINE 50 S DN WL 8800 lm / 840 / E / MPH	8800	7480	52	144	4000	Symmetrical	2273	50	50	4,1
10.02037.83.E.MPH	PROLINE 50 S DN WL 9900 lm / 830 / E / MPH	9900	8415	58	145	3000	Symmetrical	2554	50	50	4,6
10.02037.84.E.MPH	PROLINE 50 S DN WL 9900 lm / 840 / E / MPH	9900	8415	58	145	4000	Symmetrical	2554	50	50	4,6
10.02038.83.E.MPH	PROLINE 50 S DN WL 11000 lm / 830 / E / MPH	11000	9350	64	146	3000	Symmetrical	2835	50	50	5,1
10.02038.84.E.MPH	PROLINE 50 S DN WL 11000 lm / 840 / E / MPH	11000	9350	64	146	4000	Symmetrical	2835	50	50	5,1

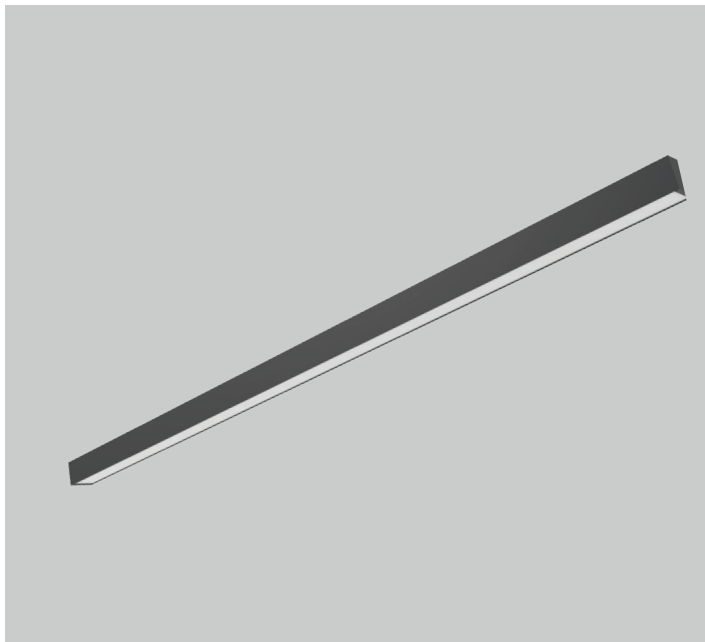


PROLINE 50 SYSTEM PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour tempera- ture [K]	Optics	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE type SE DN (start / end section) light down, ceiling mounted or suspended, end caps and suspension sets to be ordered separately											
10.00510.83.E.OP	PROLINE 50 SE DN 2200 lm / 830 / E / OP	2200	1870	14	134	3000	Symmetrical	572	50	50	1,1
10.00510.84.E.OP	PROLINE 50 SE DN 2200 lm / 840 / E / OP	2200	1870	14	134	4000	Symmetrical	572	50	50	1,1
10.00511.83.E.OP	PROLINE 50 SE DN 3300 lm / 830 / E / OP	3300	2800	20	140	3000	Symmetrical	853	50	50	1,6
10.00511.84.E.OP	PROLINE 50 SE DN 3300 lm / 840 / E / OP	3300	2800	20	140	4000	Symmetrical	853	50	50	1,6
10.00512.83.E.OP	PROLINE 50 SE DN 4400 lm / 830 / E / OP	4400	3750	26	144	3000	Symmetrical	1134	50	50	1,9
10.00512.84.E.OP	PROLINE 50 SE DN 4400 lm / 840 / E / OP	4400	3750	26	144	4000	Symmetrical	1134	50	50	1,9
10.00513.83.E.OP	PROLINE 50 SE DN 5500 lm / 830 / E / OP	5500	4675	33	142	3000	Symmetrical	1415	50	50	2,6
10.00513.84.E.OP	PROLINE 50 SE DN 5500 lm / 840 / E / OP	5500	4675	33	142	4000	Symmetrical	1415	50	50	2,6
10.00514.83.E.OP	PROLINE 50 SE DN 6600 lm / 830 / E / OP	6600	5610	39	144	3000	Symmetrical	1696	50	50	3,1
10.00514.84.E.OP	PROLINE 50 SE DN 6600 lm / 840 / E / OP	6600	5610	39	144	4000	Symmetrical	1696	50	50	3,1
10.00515.83.E.OP	PROLINE 50 SE DN 7700 lm / 830 / E / OP	7700	6545	46	142	3000	Symmetrical	1977	50	50	3,6
10.00515.84.E.OP	PROLINE 50 SE DN 7700 lm / 840 / E / OP	7700	6545	46	142	4000	Symmetrical	1977	50	50	3,6
10.00516.83.E.OP	PROLINE 50 SE DN 8800 lm / 830 / E / OP	8800	7480	52	144	3000	Symmetrical	2258	50	50	4,1
10.00516.84.E.OP	PROLINE 50 SE DN 8800 lm / 840 / E / OP	8800	7480	52	144	4000	Symmetrical	2258	50	50	4,1
10.00517.83.E.OP	PROLINE 50 SE DN 9900 lm / 830 / E / OP	9900	8415	58	145	3000	Symmetrical	2539	50	50	4,6
10.00517.84.E.OP	PROLINE 50 SE DN 9900 lm / 840 / E / OP	9900	8415	58	145	4000	Symmetrical	2539	50	50	4,6
10.00518.83.E.OP	PROLINE 50 SE DN 11000 lm / 830 / E / OP	11000	9350	64	146	3000	Symmetrical	2820	50	50	5,1
10.00518.84.E.OP	PROLINE 50 SE DN 11000 lm / 840 / E / OP	11000	9350	64	146	4000	Symmetrical	2820	50	50	5,1
10.00510.83.E.MPH	PROLINE 50 SE DN 2200 lm / 830 / E / MPH	2200	1870	14	134	3000	Symmetrical	572	50	50	1,1
10.00510.84.E.MPH	PROLINE 50 SE DN 2200 lm / 840 / E / MPH	2200	1870	14	134	4000	Symmetrical	572	50	50	1,1
10.00511.83.E.MPH	PROLINE 50 SE DN 3300 lm / 830 / E / MPH	3300	2800	20	140	3000	Symmetrical	853	50	50	1,6
10.00511.84.E.MPH	PROLINE 50 SE DN 3300 lm / 840 / E / MPH	3300	2800	20	140	4000	Symmetrical	853	50	50	1,6
10.00512.83.E.MPH	PROLINE 50 SE DN 4400 lm / 830 / E / MPH	4400	3750	26	144	3000	Symmetrical	1134	50	50	1,9
10.00512.84.E.MPH	PROLINE 50 SE DN 4400 lm / 840 / E / MPH	4400	3750	26	144	4000	Symmetrical	1134	50	50	1,9
10.00513.83.E.MPH	PROLINE 50 SE DN 5500 lm / 830 / E / MPH	5500	4675	33	142	3000	Symmetrical	1415	50	50	2,6
10.00513.84.E.MPH	PROLINE 50 SE DN 5500 lm / 840 / E / MPH	5500	4675	33	142	4000	Symmetrical	1415	50	50	2,6
10.00514.83.E.MPH	PROLINE 50 SE DN 6600 lm / 830 / E / MPH	6600	5610	39	144	3000	Symmetrical	1696	50	50	3,1
10.00514.84.E.MPH	PROLINE 50 SE DN 6600 lm / 840 / E / MPH	6600	5610	39	144	4000	Symmetrical	1696	50	50	3,1
10.00515.83.E.MPH	PROLINE 50 SE DN 7700 lm / 830 / E / MPH	7700	6545	46	142	3000	Symmetrical	1977	50	50	3,6
10.00515.84.E.MPH	PROLINE 50 SE DN 7700 lm / 840 / E / MPH	7700	6545	46	142	4000	Symmetrical	1977	50	50	3,6
10.00516.83.E.MPH	PROLINE 50 SE DN 8800 lm / 830 / E / MPH	8800	7480	52	144	3000	Symmetrical	2258	50	50	4,1
10.00516.84.E.MPH	PROLINE 50 SE DN 8800 lm / 840 / E / MPH	8800	7480	52	144	4000	Symmetrical	2258	50	50	4,1
10.00517.83.E.MPH	PROLINE 50 SE DN 9900 lm / 830 / E / MPH	9900	8415	58	145	3000	Symmetrical	2539	50	50	4,6
10.00517.84.E.MPH	PROLINE 50 SE DN 9900 lm / 840 / E / MPH	9900	8415	58	145	4000	Symmetrical	2539	50	50	4,6
10.00518.83.E.MPH	PROLINE 50 SE DN 11000 lm / 830 / E / MPH	11000	9350	64	146	3000	Symmetrical	2820	50	50	5,1
10.00518.84.E.MPH	PROLINE 50 SE DN 11000 lm / 840 / E / MPH	11000	9350	64	146	4000	Symmetrical	2820	50	50	5,1

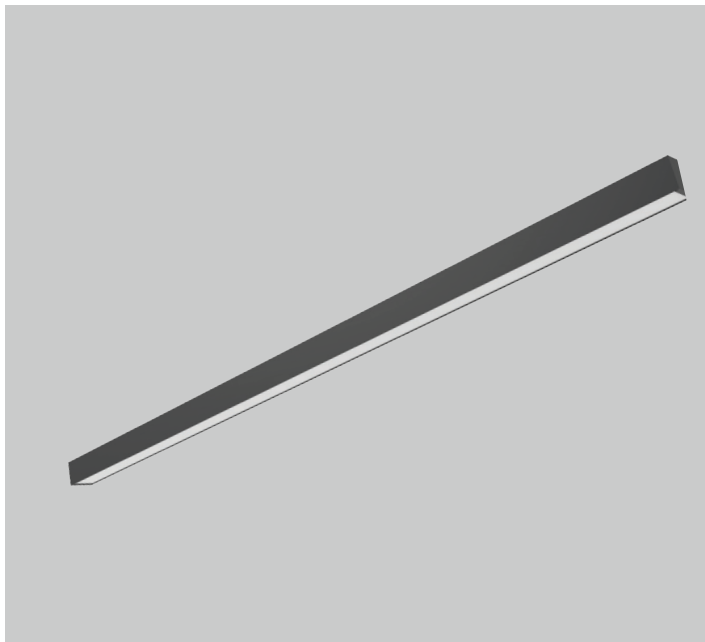

PROLINE 50 SYSTEM PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour tempera- ture [K]	Optics	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROFILE type M DN (middle section) light down, ceiling mounted or suspended, suspension sets to be ordered separately											
10.02040.83.E.OP	PROLINE 50 M DN 2200 lm / 830 / E / OP	2200	1870	14	134	3000	Symmetrical	562	50	50	1,1
10.02040.84.E.OP	PROLINE 50 M DN 2200 lm / 840 / E / OP	2200	1870	14	134	4000	Symmetrical	562	50	50	1,1
10.02041.83.E.OP	PROLINE 50 M DN 3300 lm / 830 / E / OP	3300	2800	20	140	3000	Symmetrical	843	50	50	1,6
10.02041.84.E.OP	PROLINE 50 M DN 3300 lm / 840 / E / OP	3300	2800	20	140	4000	Symmetrical	843	50	50	1,6
10.00650.83.E.OP	PROLINE 50 M DN 4400 lm / 830 / E / OP	4400	3750	26	144	3000	Symetryczna	1124	50	50	1,9
10.00650.84.E.OP	PROLINE 50 M DN 4400 lm / 840 / E / OP	4400	3750	26	144	4000	Symetryczna	1124	50	50	1,9
10.00651.83.E.OP	PROLINE 50 M DN 5500 lm / 830 / E / OP	5500	4675	33	142	3000	Symetryczna	1405	50	50	2,6
10.00651.84.E.OP	PROLINE 50 M DN 5500 lm / 840 / E / OP	5500	4675	33	142	4000	Symetryczna	1405	50	50	2,6
10.00652.83.E.OP	PROLINE 50 M DN 6600 lm / 830 / E / OP	6600	5610	39	144	3000	Symetryczna	1686	50	50	3,1
10.00652.84.E.OP	PROLINE 50 M DN 6600 lm / 840 / E / OP	6600	5610	39	144	4000	Symetryczna	1686	50	50	3,1
10.00520.83.E.OP	PROLINE 50 M DN 7700 lm / 830 / E / OP	7700	6545	46	142	3000	Symmetrical	1967	50	50	3,6
10.00520.84.E.OP	PROLINE 50 M DN 7700 lm / 840 / E / OP	7700	6545	46	142	4000	Symmetrical	1967	50	50	3,6
10.00521.83.E.OP	PROLINE 50 M DN 8800 lm / 830 / E / OP	8800	7480	52	144	3000	Symmetrical	2248	50	50	4,1
10.00521.84.E.OP	PROLINE 50 M DN 8800 lm / 840 / E / OP	8800	7480	52	144	4000	Symmetrical	2248	50	50	4,1
10.00522.83.E.OP	PROLINE 50 M DN 9900 lm / 830 / E / OP	9900	8415	58	145	3000	Symmetrical	2529	50	50	4,6
10.00522.84.E.OP	PROLINE 50 M DN 9900 lm / 840 / E / OP	9900	8415	58	145	4000	Symmetrical	2529	50	50	4,6
10.00523.83.E.OP	PROLINE 50 M DN 11000 lm / 830 / E / OP	11000	9350	64	146	3000	Symmetrical	2810	50	50	5,1
10.00523.84.E.OP	PROLINE 50 M DN 11000 lm / 840 / E / OP	11000	9350	64	146	4000	Symmetrical	2810	50	50	5,1
10.02040.83.E.MPH	PROLINE 50 M DN 2200 lm / 830 / E / MPH	2200	1870	14	134	3000	Symmetrical	562	50	50	1,1
10.02040.84.E.MPH	PROLINE 50 M DN 2200 lm / 840 / E / MPH	2200	1870	14	134	4000	Symmetrical	562	50	50	1,1
10.02041.83.E.MPH	PROLINE 50 M DN 3300 lm / 830 / E / MPH	3300	2800	20	140	3000	Symmetrical	843	50	50	1,6
10.02041.84.E.MPH	PROLINE 50 M DN 3300 lm / 840 / E / MPH	3300	2800	20	140	4000	Symmetrical	843	50	50	1,6
10.00650.83.E.MPH	PROLINE 50 M DN 4400 lm / 830 / E / MPH	4400	3750	26	144	3000	Symetryczna	1124	50	50	1,9
10.00650.84.E.MPH	PROLINE 50 M DN 4400 lm / 840 / E / MPH	4400	3750	26	144	4000	Symetryczna	1124	50	50	1,9
10.00651.83.E.MPH	PROLINE 50 M DN 5500 lm / 830 / E / MPH	5500	4675	33	142	3000	Symetryczna	1405	50	50	2,6
10.00651.84.E.MPH	PROLINE 50 M DN 5500 lm / 840 / E / MPH	5500	4675	33	142	4000	Symetryczna	1405	50	50	2,6
10.00652.83.E.MPH	PROLINE 50 M DN 6600 lm / 830 / E / MPH	6600	5610	39	144	3000	Symetryczna	1686	50	50	3,1
10.00652.84.E.MPH	PROLINE 50 M DN 6600 lm / 840 / E / MPH	6600	5610	39	144	4000	Symetryczna	1686	50	50	3,1
10.00520.83.E.MPH	PROLINE 50 M DN 7700 lm / 830 / E / MPH	7700	6545	46	142	3000	Symmetrical	1967	50	50	3,6
10.00520.84.E.MPH	PROLINE 50 M DN 7700 lm / 840 / E / MPH	7700	6545	46	142	4000	Symmetrical	1967	50	50	3,6
10.00521.83.E.MPH	PROLINE 50 M DN 8800 lm / 830 / E / MPH	8800	7480	52	144	3000	Symmetrical	2248	50	50	4,1
10.00521.84.E.MPH	PROLINE 50 M DN 8800 lm / 840 / E / MPH	8800	7480	52	144	4000	Symmetrical	2248	50	50	4,1
10.00522.83.E.MPH	PROLINE 50 M DN 9900 lm / 830 / E / MPH	9900	8415	58	145	3000	Symmetrical	2529	50	50	4,6
10.00522.84.E.MPH	PROLINE 50 M DN 9900 lm / 840 / E / MPH	9900	8415	58	145	4000	Symmetrical	2529	50	50	4,6
10.00523.83.E.MPH	PROLINE 50 M DN 11000 lm / 830 / E / MPH	11000	9350	64	146	3000	Symmetrical	2810	50	50	5,1
10.00523.84.E.MPH	PROLINE 50 M DN 11000 lm / 840 / E / MPH	11000	9350	64	146	4000	Symmetrical	2810	50	50	5,1

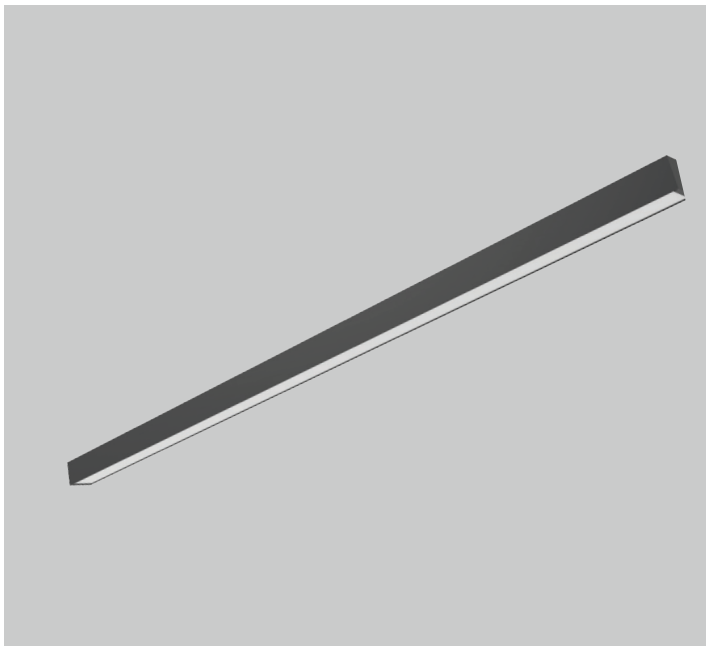

PROLINE 50 SYSTEM PROFILES

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour tempera- ture [K]	Optics	Length [mm]	Width [mm]	Height [mm]	Nett Weight [kg]
PROLINE 50 System connector type L DN (light down) ceiling mounted or suspended (suspension sets to be ordered separately)											
10.00550.83.E.OP	PROLINE 50 L DN 4400 lm / 830 / E / OP	4400	3750	26	144	3000	Symmetrical	597	597	50	1,9
10.00550.84.E.OP	PROLINE 50 L DN 4400 lm / 840 / E / OP	4400	3750	26	144	4000	Symmetrical	597	597	50	1,9
10.00550.83.E.MPH	PROLINE 50 L DN 4400 lm / 830 / E / MPH	4400	3750	26	144	3000	Symmetrical	597	597	50	1,9
10.00550.84.E.MPH	PROLINE 50 L DN 4400 lm / 840 / E / MPH	4400	3750	26	144	4000	Symmetrical	597	597	50	1,9
PROLINE 50 System connector type T DN (light down) ceiling mounted or suspended (suspension sets to be ordered separately)											
10.00551.83.E.OP	PROLINE 50 T DN 6600 lm / 830 / E / OP	6600	5610	39	144	3000	Symmetrical	1144	597	50	3,1
10.00551.84.E.OP	PROLINE 50 T DN 6600 lm / 840 / E / OP	6600	5610	39	144	4000	Symmetrical	1144	597	50	3,1
10.00551.83.E.MPH	PROLINE 50 T DN 6600 lm / 830 / E / MPH	6600	5610	39	144	3000	Symmetrical	1144	597	50	3,1
10.00551.84.E.MPH	PROLINE 50 T DN 6600 lm / 840 / E / MPH	6600	5610	39	144	4000	Symmetrical	1144	597	50	3,1
PROLINE 50 System connector type X DN (light down) ceiling mounted or suspended (suspension sets to be ordered separately)											
10.00552.83.E.OP	PROLINE 50 X DN 8800 lm / 830 / E / OP	8800	7480	52	144	3000	Symmetrical	1144	1144	50	4,1
10.00552.84.E.OP	PROLINE 50 X DN 8800 lm / 840 / E / OP	8800	7480	52	144	4000	Symmetrical	1144	1144	50	4,1
10.00552.83.E.MPH	PROLINE 50 X DN 8800 lm / 830 / E / MPH	8800	7480	52	144	3000	Symmetrical	1144	1144	50	4,1
10.00552.84.E.MPH	PROLINE 50 X DN 8800 lm / 840 / E / MPH	8800	7480	52	144	4000	Symmetrical	1144	1144	50	4,1
PROLINE 50 empty											
10.00130.100	1 meter of empty profile PROLINE 50 with alu cover							1000	50	50	1,5

Product code	Product name
ACCESSORIES	
90.00100.15	Suspension for PROLINE 50 - 1,5 m long steel wire (1 piece)
90.00101.15	Transparent 3 core power cable 1,5 m long, ceiling cup included
90.00102.15	Transparent 5 core power cable 1,5 m long, ceiling cup included
90.00108	Magnetic end cap for PROLINE 50 (1 piece)
90.00118	Linear connector for PROLINE 50
90.00112.MF	3 pole quick connectors (Male + Female)
90.00113.MF	5 pole quick connectors (Male + Female)
90.00418	TR trimless mounting bracket for PROLINE 50 (1 piece)