

# TUBE 40 WL



Round wall mounted direct or direct/indirect luminaire with lens optics. Top quality COB LED module with colour consistency MacAdams  $\leq 3$ , extensive portfolio of lumen ranges, CCTs and spectra. Variety of drivers: standard EVG on/off or DALI. Mounting on any type of wall. Body is made of aluminium tube. Standard colour RAL 9005S, any other colour from basic RAL range available at no extra cost. Variety of optics, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffusor. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction



PDF datasheet:




# TUBE 40 WL

<b>Mounting:</b>	Wall mounting
<b>Body material:</b>	Steel and aluminium
<b>Colour:</b>	Standard black RAL 9005S, other RAL colours on request
<b>Lumen output:</b>	Standard up to 800 lm/1600lm, any other on request
<b>LED module:</b>	Signify (Philips), Tridonic or equivalent SMD LED modules
<b>Colour temperature:</b>	2700/3000/4000K, other on request
<b>Colour Rendering:</b>	CRI>80 in standard, other on request
<b>Driver:</b>	EVG on-off/DALI, other on request
<b>Wireless control:</b>	N/A
<b>Daylight/Occupancy sensor:</b>	N/A
<b>Emergency unit:</b>	N/A
<b>Operating temperature range:</b>	0°C ... +35°C
<b>IP Class:</b>	IP20 in standard
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct, direct/indirect
<b>Light distribution:</b>	Symmetric
<b>Optics:</b>	Lens
<b>Beam angle:</b>	All types available in our LDT file database
<b>Warranty:</b>	5 Years standard warranty

**TUBE 40 WL** wall mounted / light down

**TUBE 40 WL UP\_DN** wall mounted / light up and down

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist. Details on wireless lighting control systems on page number 896.

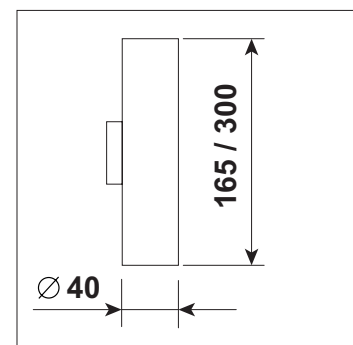

Basic dimensions



## TUBE 40 WL

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Optics	Diameter [mm]	Height [mm]	Nett Weight [kg]
Wall mounted luminaire, direct light										
60.00051.83.E.15.LNS	TUBE 40 WL / 800lm / 830 / E / 15 / LNS	800	720	5	144	3000	15°	Ø 40	165	0,4
60.00051.83.E.26.LNS	TUBE 40 WL / 800lm / 830 / E / 26 / LNS	800	720	5	144	3000	26°	Ø 40	165	0,4
60.00051.83.E.36.LNS	TUBE 40 WL / 800lm / 830 / E / 36 / LNS	800	720	5	144	3000	36°	Ø 40	165	0,4
60.00051.83.E.60.LNS	TUBE 40 WL / 800lm / 830 / E / 60 / LNS	800	720	5	144	3000	60°	Ø 40	165	0,4
60.00051.84.E.15.LNS	TUBE 40 WL / 800lm / 840 / E / 15 / LNS	800	720	5	144	4000	15°	Ø 40	165	0,4
60.00051.84.E.26.LNS	TUBE 40 WL / 800lm / 840 / E / 26 / LNS	800	720	5	144	4000	26°	Ø 40	165	0,4
60.00051.84.E.36.LNS	TUBE 40 WL / 800lm / 840 / E / 36 / LNS	800	720	5	144	4000	36°	Ø 40	165	0,4
60.00051.84.E.60.LNS	TUBE 40 WL / 800lm / 840 / E / 60 / LNS	800	720	5	144	4000	60°	Ø 40	165	0,4
60.00052.83.E.15.LNS	TUBE 40 WL / 1500lm / 830 / E / 15 / LNS	1500	1350	9	150	3000	15°	Ø 40	165	0,4
60.00052.83.E.26.LNS	TUBE 40 WL / 1500lm / 830 / E / 26 / LNS	1500	1350	9	150	3000	26°	Ø 40	165	0,4
60.00052.83.E.36.LNS	TUBE 40 WL / 1500lm / 830 / E / 36 / LNS	1500	1350	9	150	3000	36°	Ø 40	165	0,4
60.00052.83.E.60.LNS	TUBE 40 WL / 1500lm / 830 / E / 60 / LNS	1500	1350	9	150	3000	60°	Ø 40	165	0,4
60.00052.84.E.15.LNS	TUBE 40 WL / 1500lm / 840 / E / 15 / LNS	1500	1350	9	150	4000	15°	Ø 40	165	0,4
60.00052.84.E.26.LNS	TUBE 40 WL / 1500lm / 840 / E / 26 / LNS	1500	1350	9	150	4000	26°	Ø 40	165	0,4
60.00052.84.E.36.LNS	TUBE 40 WL / 1500lm / 840 / E / 36 / LNS	1500	1350	9	150	4000	36°	Ø 40	165	0,4
60.00052.84.E.60.LNS	TUBE 40 WL / 1500lm / 840 / E / 60 / LNS	1500	1350	9	150	4000	60°	Ø 40	165	0,4
Wall mounted luminaire, direct / indirect light										
60.00053.83.E.15.LNS	TUBE 40 WL UP_DN / 1200lm / 830 / E / 15 / LNS	1200	1080	8	135	3000	15°	Ø 40	300	0,8
60.00053.83.E.26.LNS	TUBE 40 WL UP_DN / 1200lm / 830 / E / 26 / LNS	1200	1080	8	135	3000	26°	Ø 40	300	0,8
60.00053.83.E.36.LNS	TUBE 40 WL UP_DN / 1200lm / 830 / E / 36 / LNS	1200	1080	8	135	3000	36°	Ø 40	300	0,8
60.00053.83.E.60.LNS	TUBE 40 WL UP_DN / 1200lm / 830 / E / 60 / LNS	1200	1080	8	135	3000	60°	Ø 40	300	0,8
60.00053.84.E.15.LNS	TUBE 40 WL UP_DN / 1200lm / 840 / E / 15 / LNS	1200	1080	8	135	4000	15°	Ø 40	300	0,8
60.00053.84.E.26.LNS	TUBE 40 WL UP_DN / 1200lm / 840 / E / 26 / LNS	1200	1080	8	135	4000	26°	Ø 40	300	0,8
60.00053.84.E.36.LNS	TUBE 40 WL UP_DN / 1200lm / 840 / E / 36 / LNS	1200	1080	8	135	4000	36°	Ø 40	300	0,8
60.00053.84.E.60.LNS	TUBE 40 WL UP_DN / 1200lm / 840 / E / 60 / LNS	1200	1080	8	135	4000	60°	Ø 40	300	0,8
60.00054.83.E.15.LNS	TUBE 40 WL UP_DN / 2500lm / 830 / E / 15 / LNS	2500	2250	17	132	3000	15°	Ø 40	300	0,8
60.00054.83.E.26.LNS	TUBE 40 WL UP_DN / 2500lm / 830 / E / 26 / LNS	2500	2250	17	132	3000	26°	Ø 40	300	0,8
60.00054.83.E.36.LNS	TUBE 40 WL UP_DN / 2500lm / 830 / E / 36 / LNS	2500	2250	17	132	3000	36°	Ø 40	300	0,8
60.00054.83.E.60.LNS	TUBE 40 WL UP_DN / 2500lm / 830 / E / 60 / LNS	2500	2250	17	132	3000	60°	Ø 40	300	0,8
60.00054.84.E.15.LNS	TUBE 40 WL UP_DN / 2500lm / 840 / E / 15 / LNS	2500	2250	17	132	4000	15°	Ø 40	300	0,8
60.00054.84.E.26.LNS	TUBE 40 WL UP_DN / 2500lm / 840 / E / 26 / LNS	2500	2250	17	132	4000	26°	Ø 40	300	0,8
60.00054.84.E.36.LNS	TUBE 40 WL UP_DN / 2500lm / 840 / E / 36 / LNS	2500	2250	17	132	4000	36°	Ø 40	300	0,8
60.00054.84.E.60.LNS	TUBE 40 WL UP_DN / 2500lm / 840 / E / 60 / LNS	2500	2250	17	132	4000	60°	Ø 40	300	0,8