
PROLINE 45 TRACK





Linear, track mounted luminaire with premium class UGR<19 lens optics. Top quality SMD LED modules with colour consistency MacAdams \leq 3, extensive portfolio of lumen ranges, CCTs and spectra. Variety of track adaptor integrated drivers: standard EVG on/off, DALI and wireless controlled as MasterConnect or Casambi on request. Built-in or remote, wireless occupancy & daylight sensor available to allow significant energy savings and wireless connectivity. Mounting on universal track Global / Unipro. Track adaptor for any other type of track system on request. Body is made of aluminium profile. Standard colour RAL 9005S, any other colour from basic RAL range available at no extra cost. Variety of lengths, optics, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffusor. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction

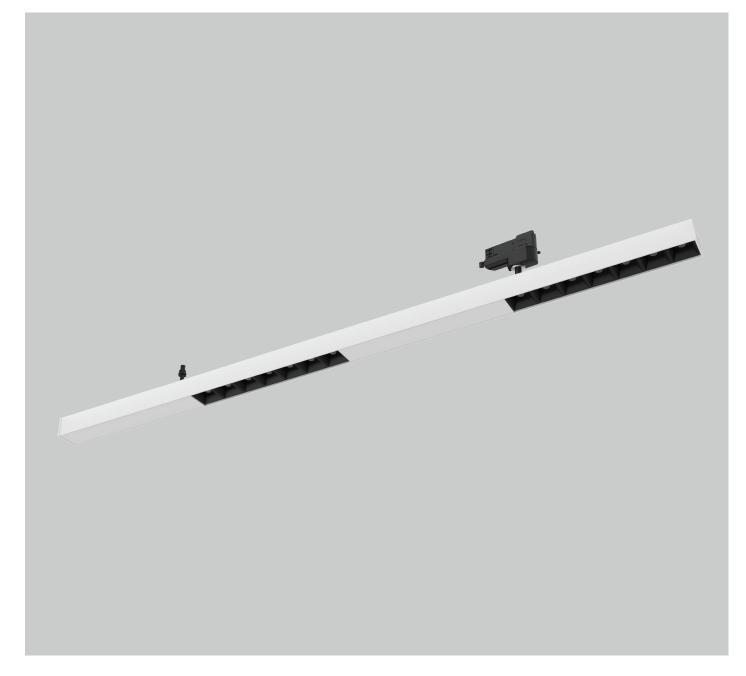

PDF datasheet:





PROLINE 45 TRACK

Mounting:	Track mounted
Body material:	Aluminium profile
Colour:	Standard black RAL 9005S, other RAL colours on request
Lumen output:	Standard up to 4400 lm, any other on request
LED module:	Signify (Philips), Tridonic or equivalent SMD LED modules
Colour temperature:	3000/4000K other on request
Colour Rendering:	CRI>80 in standard, other on request
Driver:	$EVG\xspace$ on-off/DALI/MC ($MasterConnect\xspace$)/Casambi, other on request
Wireless controll:	Philips MasterConnect / Casambi, other on request
Daylight/Occupancy sensor:	Built-in XC sensor or Wireless MCS sensor
Emergency unit:	N/A
Emergency unit: Operating temperature range:	N/A 0°C +35°C
•••	•
Operating temperature range:	0°C +35°C
Operating temperature range: IP Class:	0°C +35°C IP20 in standard
Operating temperature range: IP Class: Power:	0°C +35°C IP20 in standard 220-240V 50/60Hz
Operating temperature range: IP Class: Power: Lighting direction:	0°C +35°C IP20 in standard 220-240V 50/60Hz Direct lighting
Operating temperature range: IP Class: Power: Lighting direction: Light distribution:	0°C +35°C IP20 in standard 220-240V 50/60Hz Direct lighting Symmetric / Asymmetric
Operating temperature range: IP Class: Power: Lighting direction: Light distribution: Optics:	0°C +35°C IP20 in standard 220-240V 50/60Hz Direct lighting Symmetric / Asymmetric UGR<19 diffused lenses
Operating temperature range: IP Class: Power: Lighting direction: Light distribution: Optics: Lens shade:	0°C +35°C IP20 in standard 220-240V 50/60Hz Direct lighting Symmetric / Asymmetric UGR<19 diffused lenses BM – black matt, WM – white matt


PROLINE 50 TRACK track mounted luminaire



Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.

Zigbee
Eluetooh

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist. Details on wireless lighting control systems on page number 896.

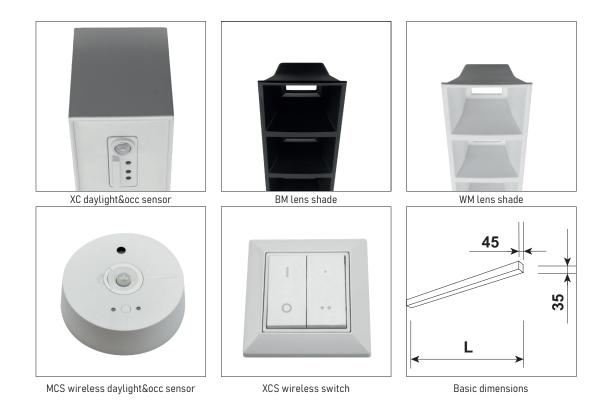

IMPERIAL reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.