


## **LENTE MINI**







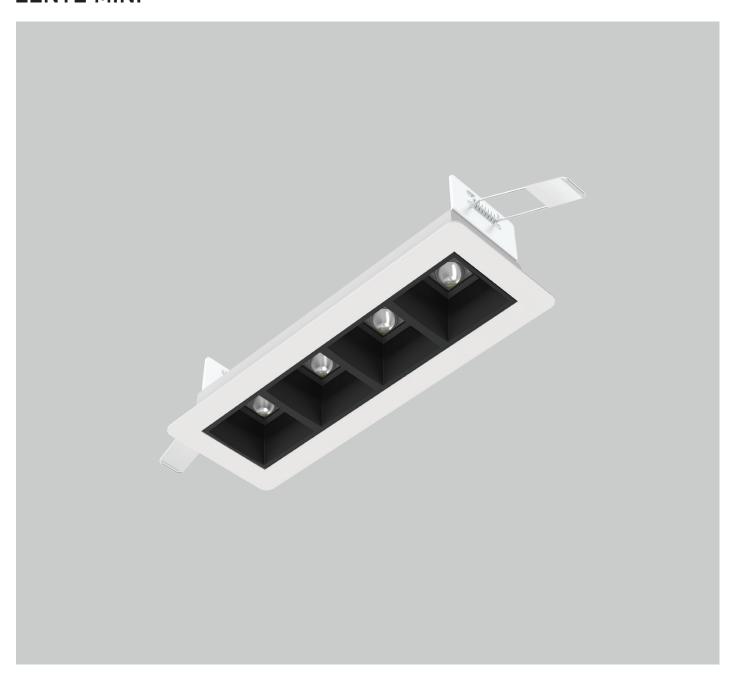



 $Rectangular\ recessed\ luminaire\ with\ premium\ class\ UGR\ \ 19\ lens\ optics\ for\ plasterboard\ ceiling\ type.\ Topological properties and the second properties of the properties of the$ quality SMD LED module with colour consistency MacAdams ≤ 3, extensive portfolio of lumen ranges, CCTs and spectra. Variety of drivers: standard EVG on/off, DALI and wireless controllers as Casambi on request. Mounting without tools into any type of suspended ceiling. Body is made of aluminium and steel. Standard colour RAL 9003M, any other colour from basic RAL range available at no extra cost. Variety of beam angles, lumen outputs and drivers allows to use this luminaire in different types of lighting projects.

Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffusor. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction:



PDF datasheet:





## **LENTE MINI**

Mounting: Recessed mounting

Body material: Steel and aluminium

**Colour:** Standard white RAL 9003M, other RAL colours on request

**Lumen output:** Standard up to 800 lm, any other on request

**LED module:** Signify (Philips), Tridonic or equivalent SMD LED module

Colour temperature: 3000/4000K other on request

Colour Rendering: CRI>80 in standard, other on request

**Driver:** EVG on-off/DALI/Casambi, other on request

Wireless controll: Casambi

Daylight/Occupancy sensor: N/A

Emergency unit: N/A

Operating temperature range:0°C ... +35°CIP Class:IP20 in standardPower:220-240V 50/60HzLighting direction:Direct lighting

Light distribution:Symmetric / AsymmetricOptics:UGR<19 diffused lenses</th>


Lens shade: BM - black matt, WM - white matt

**Beam angle:** 35°/50°/80°/ASY - all types available in our LDT file database

Warranty: 5 Years standard warranty

## **LENTE MINI** recessed mounted, light down

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist.



Basic dimensions