

# OFFICE SLIM DM



Desk mounted luminaire with direct or direct / indirect lighting and UGR<19 diffuser. Top quality SMD LED module with colour consistency MacAdams  $\leq 3$ , extensive portfolio of lumen ranges, CCTs and spectra. Variety of drivers: standard EVG on/off, DALI and wireless controlled as MasterConnect or Casambi on request. Optional built-in occupancy & daylight sensor to allow significant energy savings and wireless connectivity. Body is made of aluminium and steel. Standard colour RAL 9005S, any other colour from basic RAL range available at no extra cost. Variety of diffusers, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Power cable with country-specific plug and custom made desk fixing on request.

Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffuser. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction



PDF datasheet:



# OFFICE SLIM DM

<b>Mounting:</b>	Desk mounting
<b>Body material:</b>	Steel and aluminium
<b>Colour:</b>	Standard black RAL 9005S, other RAL colours on request
<b>Lumen output:</b>	Standard up to 8800 lm, any other on request
<b>LED module:</b>	Signify (Philips), Tridonic or equivalent SMD LED modules
<b>Colour temperature:</b>	3000/4000K/2700-6500K TunableWhite, other on request
<b>Colour Rendering:</b>	CRI>80 in standard, other on request
<b>Driver:</b>	EVG on-off/DALI/TW DT8/MC ( MasterConnect ), other on request
<b>Wireless control:</b>	Philips MasterConnect / Tridonic / Helvar / Casambi, other on request
<b>Daylight/Occupancy sensor:</b>	XC sensor, other on request
<b>Emergency unit:</b>	N/A
<b>Operating temperature range:</b>	0°C ... +35°C
<b>IP Class:</b>	IP20 in standard
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct or direct/indirect lighting
<b>Light distribution:</b>	Symmetric
<b>Optics:</b>	N/A
<b>Beam angle:</b>	All types available in our LDT file database
<b>Diffuser:</b>	OP opal acrylic / MP19H microprismatic UGR<19
<b>Warranty:</b>	5 Years standard warranty

**OFFICE SLIM DM** desk mounted luminaire / light down  
**OFFICE SLIM DM UP\_DN** desk mounted luminaire / light up and down




Energy saving MasterConnect wireless lighting control system with daylight and movement detection technology on request.




All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist. Details on wireless lighting control systems on page number 896.



XC daylight&occ sensor



OP opal diffuser

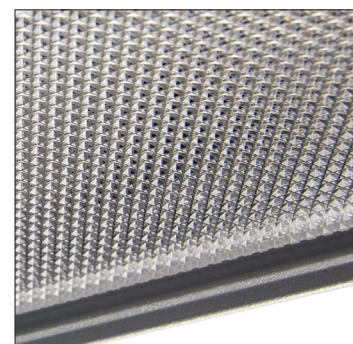


MP19H microprismatic diffuser



MCS wireless daylight&occ sensor



XCS wireless switch

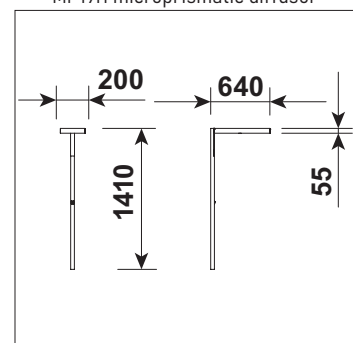

Basic dimensions