

# HATOR 100



Cylindrical, surface mounted IP65 luminaire with high quality lens optics. Top quality COB LED module with colour consistency MacAdams 3, extensive portfolio of lumen ranges, CCTs and spectra. Standard EVG on/off driver. Mounting on any type of ceiling. Body is made of aluminium. Standard colour RAL 7016 any other colour on request. Selection of beam angles and lumen outputs allows to use this luminaire in different types of lighting projects. Standard luminaire is not intended for use in increased corrosivity category environment, e.g. with increased salt concentration. Extra corrosion protection is available on request.

Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffusor. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction



PDF datasheet:




# HATOR 100

<b>Mounting:</b>	Surface mounting
<b>Body material:</b>	Aluminium and steel
<b>Colour:</b>	Standard anthracite grey RAL 7016, other RAL colours on request
<b>Lumen output:</b>	Standard up to 1500 lm any other on request
<b>LED module:</b>	Signify (Philips), Tridonic or equivalent COB LED module
<b>Colour temperature:</b>	3000/4000K other on request
<b>Colour Rendering:</b>	CRI>80 in standard, other on request
<b>Driver:</b>	EVG on-off, other on request
<b>Wireless control:</b>	N/A
<b>Daylight/Occupancy sensor:</b>	N/A
<b>Emergency unit:</b>	N/A
<b>Operating temperature range:</b>	-20°C ... +40°C
<b>IP Class:</b>	IP65 in standard
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct lighting
<b>Light distribution:</b>	Symmetric
<b>Optics:</b>	Lens
<b>Beam angle:</b>	90°
<b>Diffuser:</b>	Clear silicon lense
<b>Warranty:</b>	5 Years standard warranty

## HATOR 100 surface mounted luminaire

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist.

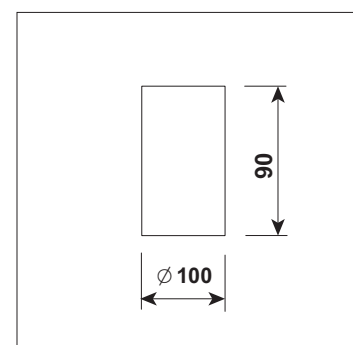

Basic dimensions