

LUCA



Outdoor, IP65 park luminaire with lense optics. Body is made of aluminium, diffuser of clear PMMA. Top quality COB LED module with colour consistency MacAdams 3, extensive portfolio of lumen ranges, CCTs and spectra. Standard EVG on/off driver, DALI on request. Standard RAL 7016, other colour on request. Mounting on standard 76 mm pole, custom made fixing point on request. Selection of optics, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Standard luminaire is not intended for use in increased corrosivity category environment, e.g. with increased salt concentration. Extra corrosion protection is available on request.

Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffuser. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction



PDF datasheet:




LUCA

Mounting:	Pole mounting - standard 76 mm pole any other on request
Body material:	Aluminium
Colour:	Standard anthracite grey RAL 7016, other RAL colours on request
Lumen output:	Standard up to 3000 lm, any other on request
LED module:	Signify (Philips), Tridonic or equivalent COB LED module
Colour temperature:	3000/4000K, other on request
Colour Rendering:	CRI>80 in standard, other on request
Driver:	EVG on-off, DALI, other on request
Wireless control:	N/A
Daylight/Occupancy sensor:	N/A
Emergency unit:	N/A
Operating temperature range:	-30°C ... +45°C
IP Class:	IP65 in standard
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Light distribution:	Symmetric
Optics:	Lens
Beam angle:	Wide selection of optics - please refer to our LDT database
Diffuser:	PMMA clear acrylic
Warranty:	5 Years standard warranty

LUCA pole mounted luminaire

All current index numbers, lumen outputs, power consumption and many other technical information are available in our 2024 pricelist.

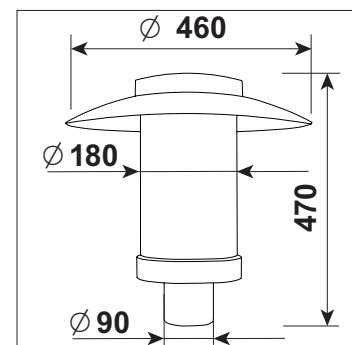

Basic dimensions