


DL 315 PERF



Recessed downlight for compact fluorescent lamp with perforated diffuser. Body is made of steel and aluminium. All RAL colours are available.

Technical extras upon request:

1. Emergency supply
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).
Please add DALI after index number.

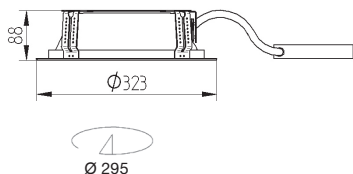

Index no.	Lamp	Weight	Socket
538.315.126E	EVG, 1x26 TC-DEL	2,40 kg	G24q-3
538.315.132E	EVG, 1x32 TC-TEL	2,40 kg	GX24q-3
538.315.142E	EVG, 1x42 TC-TEL	2,40 kg	GX24q-4

IP20

230 V
50 Hz