

PROFI TEC5 OP LED LINE




Pendent, direct LED luminaire. Light source - Philips, Osram or Tridonic LED module. Standard EVG ballast, DALI or Touch Dali version on request. Body is made of aluminium profile and available in all RAL colours. This luminaire can be connected in long lighting lines.

We can prepare it in different lengths and shapes on request. Standard length of suspension set - 1,5 meter.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

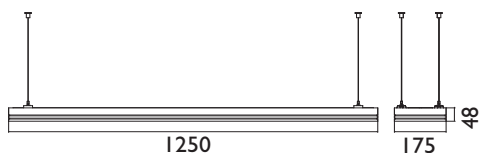

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
003506.LL4400/830	4400 lm	30 W	3000 K	Ra > 80	50.000 h	3,20 kg
003506.LL4400/840	4400 lm	30 W	4000 K	Ra > 80	50.000 h	3,20 kg
003506.LL8000/830	8000 lm	58 W	3000 K	Ra > 80	50.000 h	3,20 kg
003506.LL8000/840	8000 lm	58 W	4000 K	Ra > 80	50.000 h	3,20 kg

